

Armour transition for 3-core joints
for armoured cables for medium voltage

Armour continuity set for armoured 3-core cable joints.




Product description

Article name	AUF 6
Article number	195368

Characteristics
Quick, safe and easy assembly
Superior electrical properties
High mechanical strength

Applications
Earthing continuity and earth bonding
For cast resin, heat shrinkable and slip-on cable accessories
Enables solder-free electrical connection of metal cable components (screen, armouring, metal sheath)

Technical data

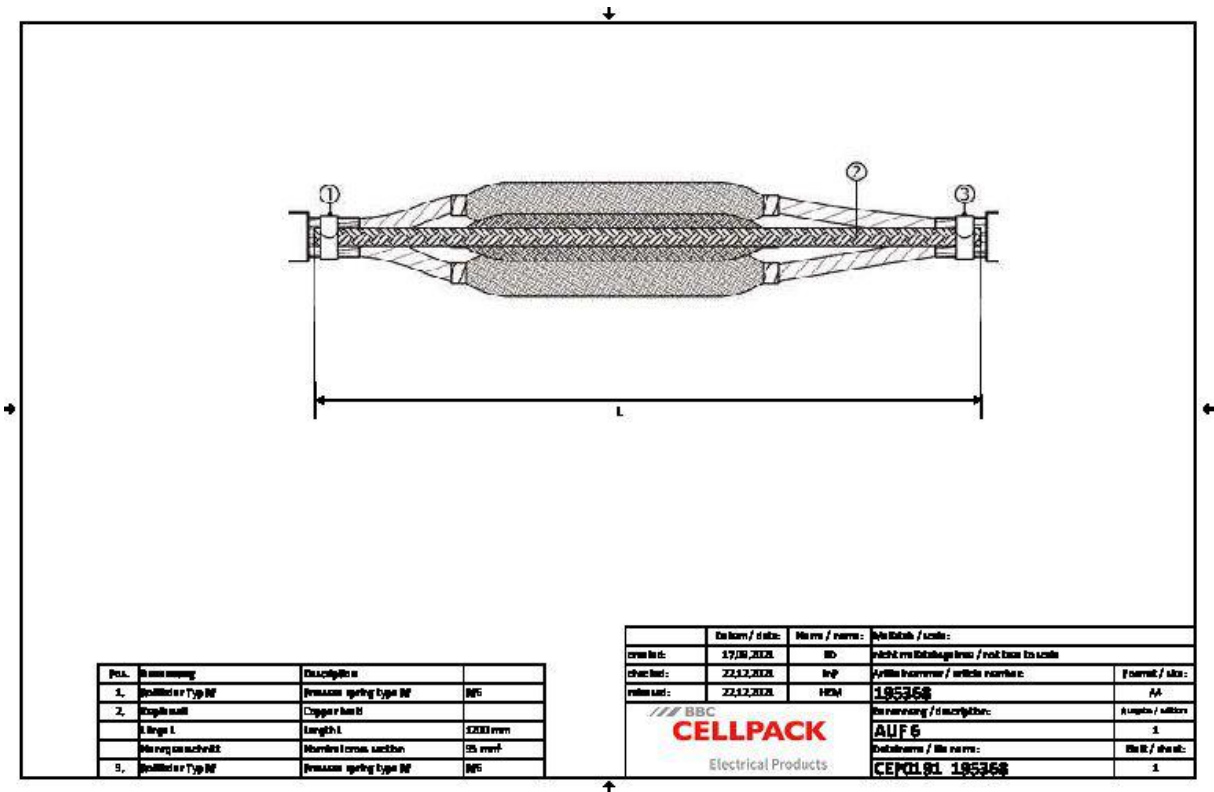

Article name	AUF 6
Article number	195368
Pressure spring type	RF6
Nominal cross section Copper earth braid	35 mm²
Length L	1200 mm
Nominal cross section 7,2 kV min	400 mm²
Nominal cross section 7,2 kV max	400 mm²
Nominal cross section 12 kV min	300 mm²
Nominal cross section 12 kV max	400 mm²
Nominal cross section 17,5 kV min	300 mm²
Nominal cross section 17,5 kV max	400 mm²
Nominal cross section 24 kV min	185 mm²
Nominal cross section 24 kV max	300 mm²
Nominal cross section 36 kV min	95 mm²
Nominal cross section 36 kV max	300 mm²

Logistics data

Article name	AUF 6
Article number	195368
Delivery scope	1 Set for 3 phases: Copper braid tapes, pressure springs RF
Country of origin	Germany
Customs tariff number	85444995
EAN/GTIN	4010311050065

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	25
Base unit of measure	Piece	Piece
Lenght (mm)	305	470
Width (mm)	185	400
Height (mm)	35	230
Net weight (kg)	0.568	14.2
Gross weight (kg)	0.568	14.5