

## Armour transition for 3-core joints

for armoured cables for medium voltage

Armour continuity set for armoured 3-core cable joints.



### Product description

Article name	AUF 6
Article number	195368

#### Characteristics


Quick, safe and easy assembly  
Superior electrical properties  
High mechanical strength

#### Applications

Earthing continuity and earth bonding  
For cast resin, heat shrinkable and slip-on cable accessories

Enables solder-free electrical connection of metal cable components (screen, armouring, metal sheath)

## Technical data

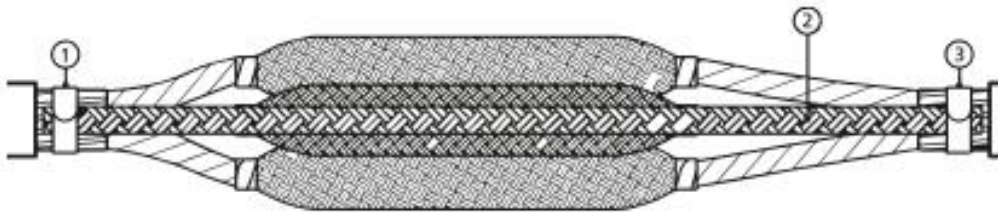

Article name	AUF 6
Article number	195368
Pressure spring type	RF6
Nominal cross section Copper braid	35 mm <sup>2</sup>
Length L	1200 mm
Nominal cross section 7,2 kV min	400 mm <sup>2</sup>
Nominal cross section 7,2 kV max	400 mm <sup>2</sup>
Nominal cross section 12 kV min	300 mm <sup>2</sup>
Nominal cross section 12 kV max	400 mm <sup>2</sup>
Nominal cross section 17,5 kV min	300 mm <sup>2</sup>
Nominal cross section 17,5 kV max	400 mm <sup>2</sup>
Nominal cross section 24 kV min	185 mm <sup>2</sup>
Nominal cross section 24 kV max	300 mm <sup>2</sup>
Nominal cross section 36 kV min	95 mm <sup>2</sup>
Nominal cross section 36 kV max	300 mm <sup>2</sup>

## Logistics data

Article name	AUF 6
Article number	195368
Delivery scope	1 Set for 3 phases: Copper braid tapes, pressure springs RF
Country of origin	Germany
Customs tariff number	74130000
EAN/GTIN	4010311050065

## Packaging data

Packaging type	Bag1	Carton
Content quantity	1	25
Unit of measure	Piece	Piece
Length (mm)	305	470
Width (mm)	185	400
Height (mm)	35	230
Net weight (kg)	0.568	14.2
Gross weight (kg)	0.568	14.5