

1-core outdoor slip-on cable termination  
for 1-core polymeric cables

Contrax cable terminations CAE-F are suitable for all 1-core polymeric-insulated cables (PVC, PE, XLPE, EPR) with different types of semi-conductive layers (graphitecoated, removable or strippable) and screen design (wire or tape). Suitable for compression cable lugs.




Product description

Article name	CAE-F 24kV 35-120
Article number	199194
Notes	Can be used also for cables Um = 7,2 kV, then the minimum diameter over conductor insulation has to be checked.
Optional accessory	EGA earthing kit for cables with tape screen (see Connecting technology) Compression cable lugs (see Connecting technology)

Characteristics
Silicone slip-on components for quick, safe and easy assembly
Wide cross-section range
Ready for immediate operation

Applications
Outdoor

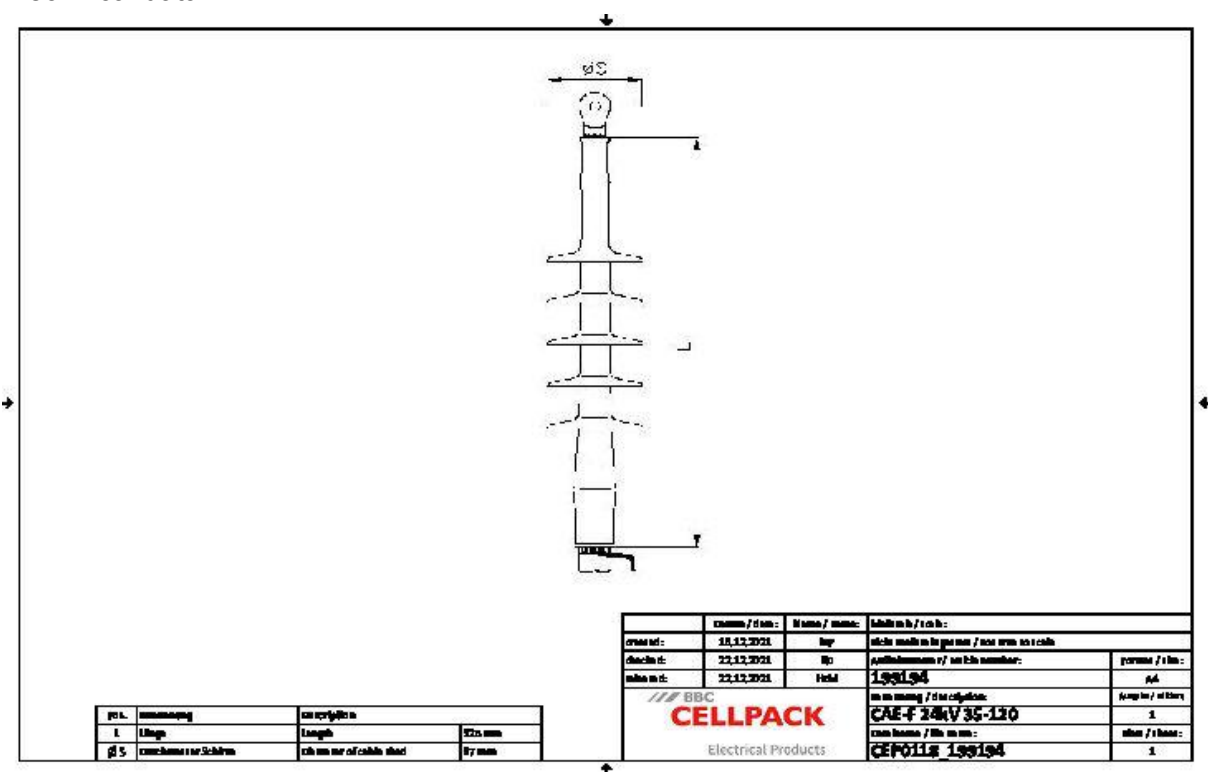

Article name	CAE-F 24kV 35-120
Article number	199194
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	CENELEC HD 629.1
Length L	325 mm
Diameter over core insulation after removal of the outer conductive layer min	17.3 mm
Number of sheds per phase	4 Pieces
Diameter shed	87 mm
Nominal cross section 24 kV min	35 mm <sup>2</sup>
Nominal cross section 24 kV max	120 mm <sup>2</sup>

## Logistics data

Article name	CAE-F 24kV 35-120
Article number	199194
Delivery scope	3 One-piece slip-on silicone cable terminations with integrated stress control element
	Silicone tubes
	Sealing tape
	Assembly material
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311054827

## Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	84
Base unit of measure	Piece	Piece
Length (mm)	383	1200
Width (mm)	192	800
Height (mm)	132	1130
Net weight (kg)	1.032	86.688
Gross weight (kg)	1.032	104.888