

1-core outdoor slip-on cable termination
for 1-core polymeric cables

Contrax cable terminations CAE-F are suitable for all 1-core polymeric-insulated cables (PVC, PE, XLPE, EPR) with different types of semi-conductive layers (graphitecoated, removable or strippable) and screen design (wire or tape). Suitable for compression cable lugs.



Product description

Article name	CAE-F 24kV 120-400
Article number	199196
Notes	Can be used also for cables Um = 7,2 kV, then the minimum diameter over conductor insulation has to be checked.
Optional accessory	EGA earthing kit for cables with tape screen (see Connecting technology) Compression cable lugs (see Connecting technology)

Characteristics


Silicone slip-on components for quick, safe and easy assembly

Wide cross-section range

Ready for immediate operation

Applications

Outdoor

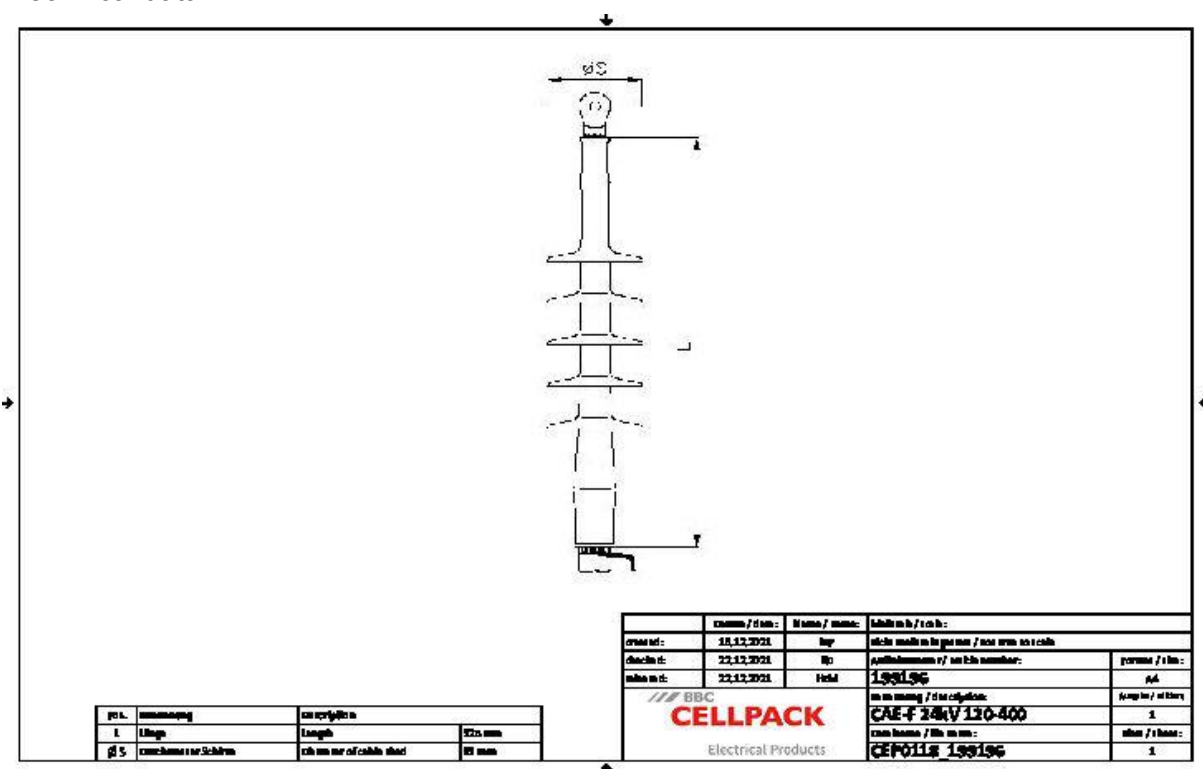

Article name	CAE-F 24kV 120-400
Article number	199196
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	CENELEC HD 629.1
Length L	325 mm
Diameter over core insulation after removal of the outer conductive layer min	23.1 mm
Number of sheds per phase	4 Pieces
Diameter shed	93 mm
Nominal cross section 24 kV min	120 mm ²
Nominal cross section 24 kV max	400 mm ²

Logistics data

Article name	CAE-F 24kV 120-400
Article number	199196
Delivery scope	3 One-piece slip-on silicone cable terminations with integrated stress control element
	Silicone tubes
	Sealing tape
	Assembly material
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311054841

Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	36
Base unit of measure	Piece	Piece
Length (mm)	422	1200
Width (mm)	265	800
Height (mm)	155	1130
Net weight (kg)	1.302	46.872
Gross weight (kg)	1.302	65.072