

3-core indoor cable termination
for 3-core trailing cables

Combination of slip-on and heat shrinkable components for 3-core trailing cables. Suitable for compression or screw cable lugs.



Product description

Article name	CHE-3I(T) 12kV 70-120
Article number	146310
Notes	Other cable terminations available on request.
Optional accessory	Cable lugs (see Connecting technology)

Characteristics

Flexible silicone stress control elements ensure reliable stress control under all operating conditions

Wide cross-section range


Quick, safe and easy assembly

Ready for immediate operation

Applications

Indoor

Technical data

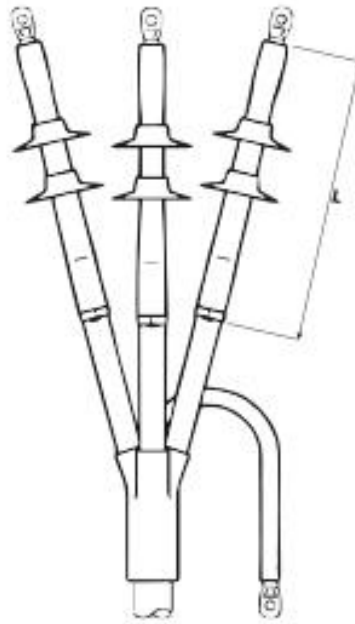

Article name	CHE-3I(T) 12kV 70-120
Article number	146310
Voltage levels	U0/U (Um) 6/10 (12) kV - 6,35/11 (12) kV
Nominal cross section 36 kV min	70 mm ²
Nominal cross section 36 kV max	120 mm ²

Logistics data

Article name	CHE-3I(T) 12kV 70-120
Article number	146310
Delivery scope	Spreader cap
	Heat shrinkable tube (tracking resistant)
	Heat shrinkable tube medium-walled
	Silicone field control elements
	Silicone sheds
	Sealing tape
	Assembly material
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311096681

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	84
Unit of measure	Piece	Piece
Length (mm)	435	1200
Width (mm)	175	800
Height (mm)	175	1130
Net weight (kg)	1.323	111.132
Gross weight (kg)	1.323	129.332