

Outdoor cable termination

for 3 lead sheath cables from 24 to 36 kV (MIND)

Hybrid cable terminations CHEP(3Pb)-3F are suitable for 3 lead sheath cables from 24 to 36 kV (for MIND cables only). Suitable for compression and screw cable lugs.




Product description

Article name	CHEP(3Pb)-3F 24kV 16-35
Article number	197567
Notes	For cables with draining compound, please contact us.
Optional accessory	Cable lugs (see Connecting technology)

Characteristics	Applications
Combination of slip-on and heat shrinkable components	Outdoor
Wide cross-section range	
Quick, safe and easy assembly	
Ready for immediate operation	

Technical data

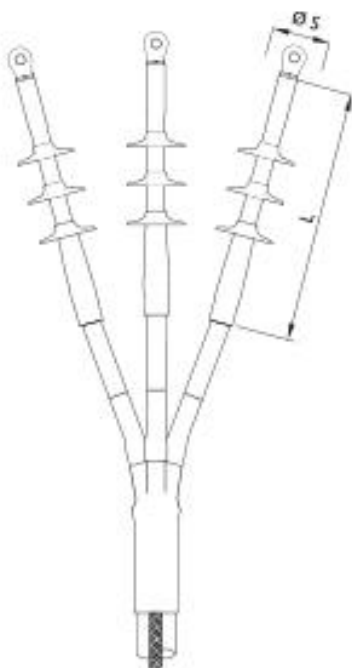

Article name	CHEP(3Pb)-3F 24kV 16-35
Article number	197567
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Length L	600 mm
Diameter over core insulation after removal of the outer conductive layer min	12.2 mm
Number of sheds per phase	3 Pieces
Diameter shed	80 mm
Nominal cross section 24 kV min	16 mm ²
Nominal cross section 24 kV max	35 mm ²

Logistics data

Article name	CHEP(3Pb)-3F 24kV 16-35
Article number	197567
Delivery scope	Weatherproof preader cap
	Heat shrinkable tube (tracking resistant)
	Silicone sheds
	Oil barrier tubing
	Earthing wire
	Pressure spring
	Sealing tape
	Oil-barrier field control filling tape (blue)
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311051154

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	42
Unit of measure	Piece	Piece
Lenght (mm)	730	1200
Width (mm)	165	800
Height (mm)	157	1130
Net weight (kg)	2.053	86.226
Gross weight (kg)	2.053	104.426