

Outdoor cable termination

for H-Type cables from 24 to 36 kV (MIND)

Hybrid cable terminations CHEP(H)-3F are suitable for H-Type cables from 24 to 36 kV (for MIND cables only). Suitable for compression and screw cable lugs.




Product description

Article name	CHEP(H)-3F 24kV 70-240
Article number	197545
Notes	For cables with draining compound, please contact us.
Optional accessory	Cable lugs (see Connecting technology)

Characteristics
Wide cross-section range
Quick, safe and easy assembly
Ready for immediate operation

Applications
Outdoor

Technical data

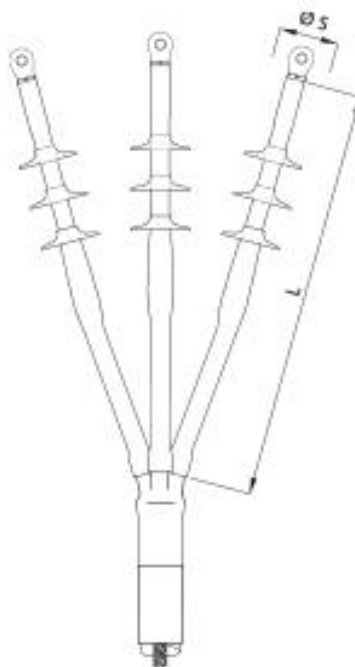

Article name	CHEP(H)-3F 24kV 70-240
Article number	197545
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Length L	850 mm
Diameter over core insulation after removal of the outer conductive layer min	19.9 mm
Number of sheds per phase	3 Pieces
Diameter shed	85 mm
Nominal cross section 24 kV min	70 mm ²
Nominal cross section 24 kV max	240 mm ²

Logistics data

Article name	CHEP(H)-3F 24kV 70-240
Article number	197545
Delivery scope	Conductive spreader cap
	Thick wall heat shrinkable outer tube with hot melt adhesive
	Heat shrinkable tube (tracking resistant)
	Oil barrier tubing
	Silicone sheds
	Earthing wire
	Pressure spring
	Sealing tape
	Oil-barrier field control filling tape (blue)
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311050935

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	12
Unit of measure	Piece	Piece
Length (mm)	858	1200
Width (mm)	255	800
Height (mm)	225	1130
Net weight (kg)	3.198	38.376
Gross weight (kg)	3.198	56.576