

Indoor cable termination

for H-Type cables from 24 to 36 kV (MIND)

Hybrid cable terminations CHEP(H)-3I are suitable for H-Type cables from 24 to 36 kV (for MIND cables only). Suitable for compression and screw cable lugs.



Product description

Article name	CHEP(H)-3I 24kV 50-150
Article number	197532
Notes	For cables with draining compound, please contact us.
Optional accessory	Cable lugs (see Connecting technology)


Characteristics

Wide cross-section range
Quick, safe and easy assembly
Ready for immediate operation

Applications

Indoor
--------

## Technical data

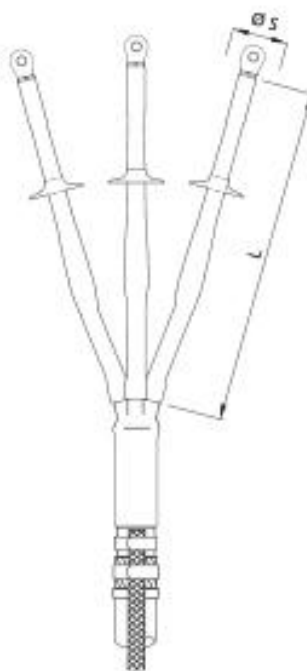

Article name	CHEP(H)-3I 24kV 50-150
Article number	197532
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Length L	500 mm
Diameter over core insulation after removal of the outer conductive layer min	17.3 mm
Number of sheds per phase	1 Pieces
Diameter shed	85 mm
Nominal cross section 24 kV min	50 mm <sup>2</sup>
Nominal cross section 24 kV max	150 mm <sup>2</sup>

## Logistics data

Article name	CHEP(H)-3I 24kV 50-150
Article number	197532
Delivery scope	Conductive spreader cap
	Heat shrinkable tube (tracking resistant)
	Conductive heat shrinkable tubes
	Oil barrier tubing
	Silicone sheds
	Filling tape
	Earthing wire
	Pressure spring
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311050805

## Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	24
Unit of measure	Piece	Piece
Length (mm)	568	1200
Width (mm)	353	800
Height (mm)	150	1130
Net weight (kg)	2.189	52.536
Gross weight (kg)	2.189	70.736