

## Transition joint with screw connectors

for 3 lead sheath cables to three 1-core polymeric cables

Hybrid transition joints CHMP(3Pb)SV3-1 for transition to three 1-core polymeric insulated cables are suitable for all 3 lead sheath cables for 24 kV. With screw connectors.



## Product description

Article name	CHMP(3Pb)SV3-1 24kV 95-240
Article number	336263

### Characteristics

Reliable stress control due to flexible silicone stress control elements

Wide cross-section range

Quick, safe and easy assembly

Ready for immediate operation

### Applications

Indoor

Outdoor


Underground

Water

Installation ducts

Ductwork

## Technical data

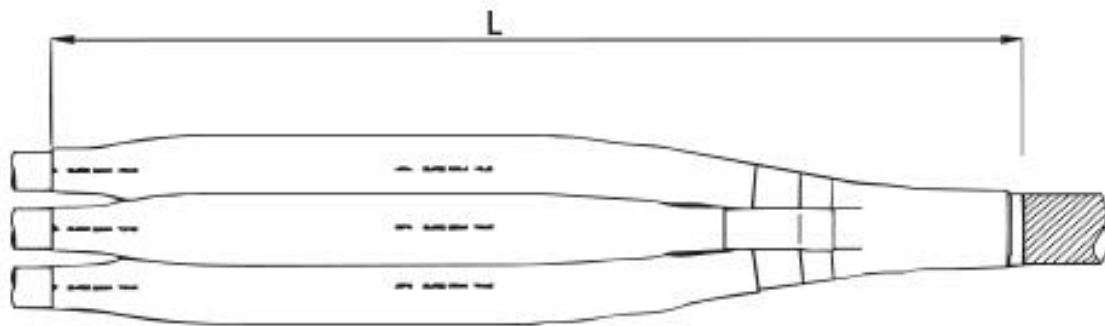

Article name	CHMP(3Pb)SV3-1 24kV 95-240
Article number	336263
Voltage levels	U <sub>0</sub> /U (U <sub>m</sub> ) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Length L	1000 mm
Diameter over core insulation after removal of the outer conductive layer min	19.9 mm
Nominal cross section 24 kV min	95 mm <sup>2</sup>
Nominal cross section 24 kV max	240 mm <sup>2</sup>

## Logistics data

Article name	CHMP(3Pb)SV3-1 24kV 95-240
Article number	336263
Delivery scope	Spreader cap
	Thick wall heat shrinkable outer tube with hot melt adhesive
	Oil barrier tubing
	Silicone field control elements
	Earthing wire
	Heat shrinkable tubes
	Copper braid tape
	Assembly material
	Pressure spring
	Field control filling tape (blue)
	Sealing tape
	Fire protection wrapping
	Innovative screw connector with conductive cover
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311165165

## Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	12
Base unit of measure	Piece	Piece
Lenght (mm)	868	1200
Width (mm)	384	800
Height (mm)	187	1130
Net weight (kg)	5.953	71.436
Gross weight (kg)	5.953	89.636