

Transition joint with screw connectors

from H-Type cables to polymeric three 1-core cables

Hybrid transition joints CHMP(H)SV3-1 for transition to three 1-core polymericinsulated cables, are suitable for H-Type cables for 24 kV. With screw connectors.



Product description

Article name	CHMP(H)SV3-1 24kV 70-150
Article number	336550

Characteristics

Reliable stress control due to flexible silicone stress control elements

Wide cross-section range

Quick, safe and easy assembly

Ready for immediate operation

Applications

Indoor

Outdoor


Underground

Water

Installation ducts

Ductwork

Technical data

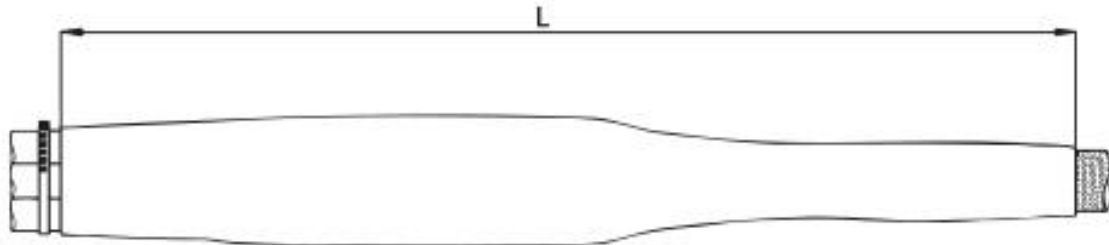

Article name	CHMP(H)SV3-1 24kV 70-150
Article number	336550
Voltage levels	U ₀ /U (U _m) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Length L	1100 mm
Diameter over core insulation after removal of the outer conductive layer min	19.9 mm
Nominal cross section 24 kV min	70 mm ²
Nominal cross section 24 kV max	150 mm ²

Logistics data

Article name	CHMP(H)SV3-1 24kV 70-150
Article number	336550
Delivery scope	Spreader cap Thick wall heat shrinkable outer tube with hot melt adhesive Oil barrier tubing Silicone field control elemens Earthing wire Heat shrinkable tubes Copper braid tape Assembly material Pressure spring Field control filling tape (blue) Sealing tape Fire protection wrapping Innovative screw connector with conductive cover Installation instruction
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311165202

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	12
Unit of measure	Piece	Piece
Lenght (mm)	865	1200
Width (mm)	369	800
Height (mm)	170	1130
Net weight (kg)	6.353	76.236
Gross weight (kg)	6.353	94.436