

Straight-through joint

for H-Type cables from 24 to 36 kV

Hybrid straight-through joints CHMPP(H)3 are suitable for H-Type cables from 24 to 36 kV. The scope of application can be reduced by an appropriate padding set for the mass-impregnated paper cable. Suitable for compression connectors.




Product description

Article name	CHMPP(H)3 24kV 95-240
Article number	197663
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Wide cross-section range
Quick, safe and easy assembly
Ready for immediate operation

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

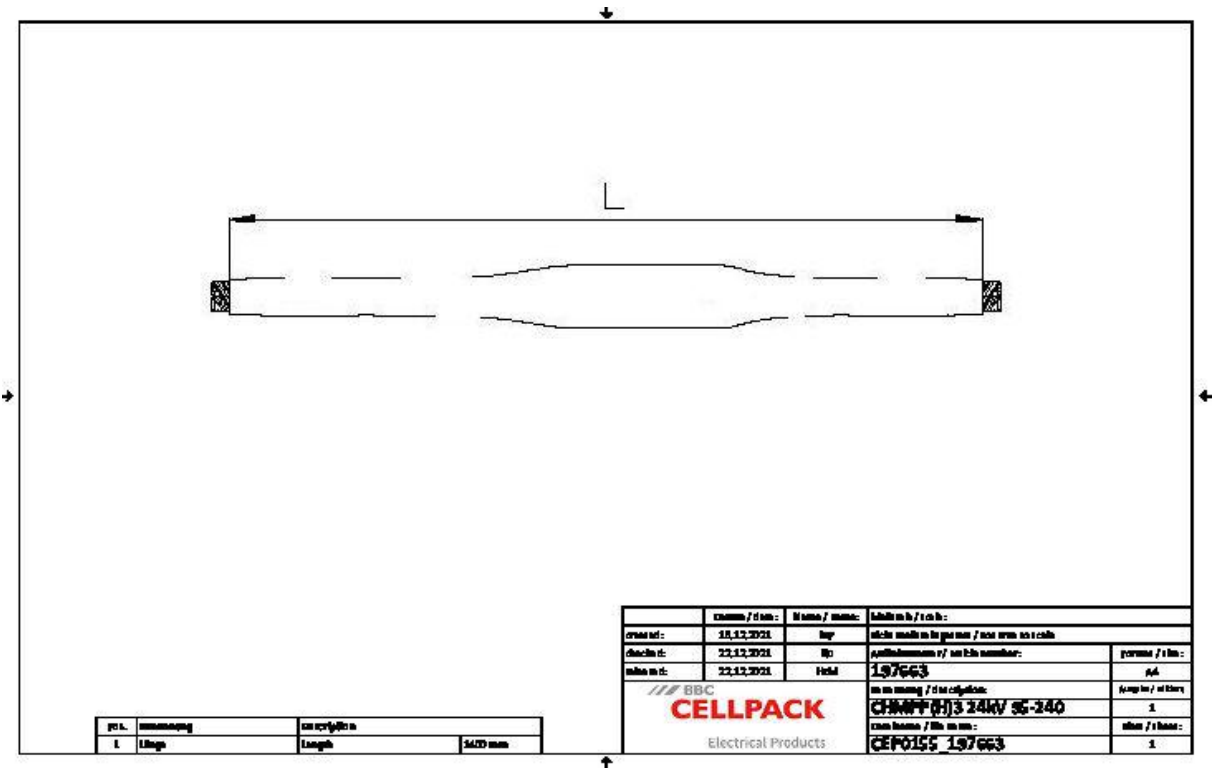

Article name	CHMPP(H)3 24kV 95-240
Article number	197663
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	DIN VDE 0278-629-2
Diameter Connector 24kV max	34 mm
Length Connector 24kV max	145 mm
Length L	1400 mm
Diameter over core insulation after removal of the outer conductive layer min	21.6 mm
Nominal cross section 24 kV min	95 mm ²
Nominal cross section 24 kV max	240 mm ²

Logistics data

Article name	CHMPP(H)3 24kV 95-240
Article number	197663
Delivery scope	Spreader cap
	Thick wall heat shrinkable outer tube with hot melt adhesive
	Oil barrier tubing
	Silicone field control elements
	Earthing wire
	Heat shrinkable tubes
	Copper braid tape
	Assembly material
	Pressure spring
	Field control filling tape (blue)
	Sealing tape
	Fire protection wrapping
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311052007

Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	8
Base unit of measure	Piece	Piece
Length (mm)	1110	1200
Width (mm)	330	800
Height (mm)	338	1130
Net weight (kg)	8.697	69.576
Gross weight (kg)	8.697	70.382