

Straight-through joint

for belted cables / H-Type cables up to 17.5 kV (MIND)

Hybrid straight-through joints CHMPPR3 are suitable for belted cables and H-Type cables up to 17.5 kV. Suitable for compression connectors.




Product description

Article name	CHMPPR3 17kV 35-50
Article number	197658
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Wide cross-section range
Quick, safe and easy assembly
Ready for immediate operation

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

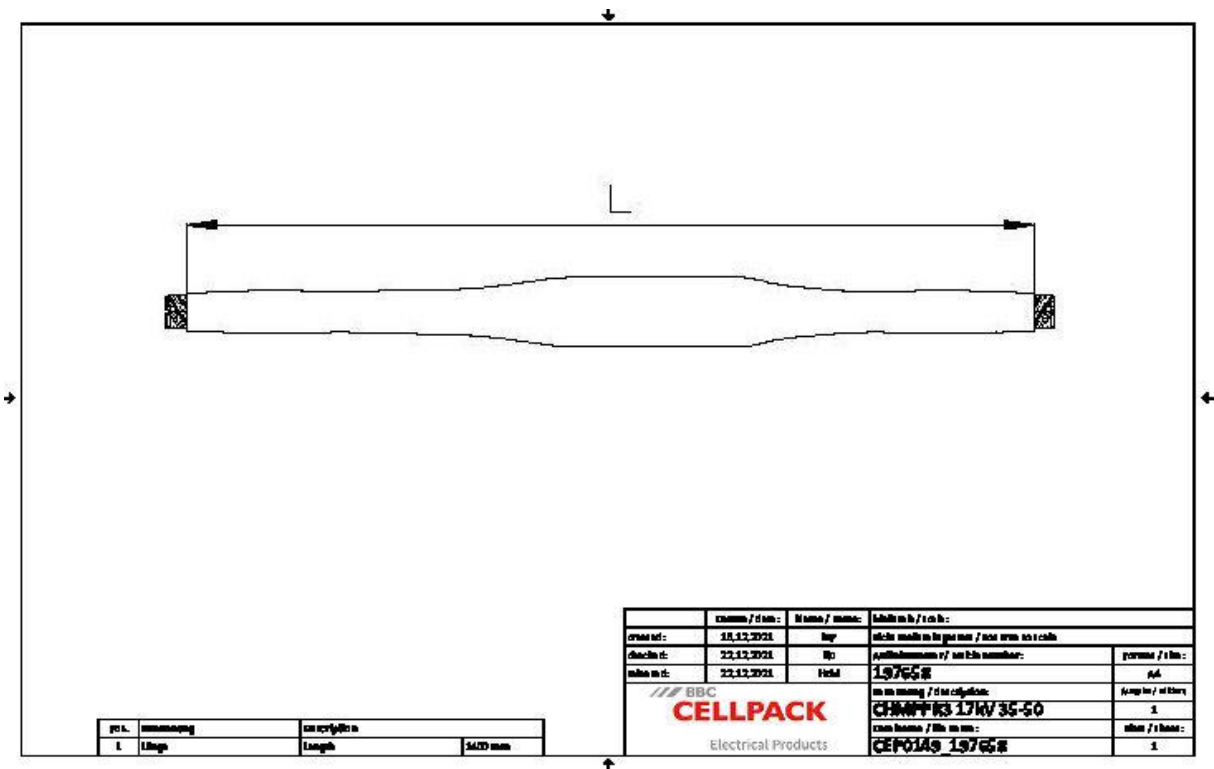

Article name	CHMPPR3 17kV 35-50
Article number	197658
Voltage levels	U0/U (Um) 6/10 (12) kV - 8,7/15 (17,5) kV
Test standards	DIN VDE 0278-629-2
Diameter Connector 12kV max	25 mm
Diameter Connector 17,5kV max	20 mm
Length Connector 12kV max	145 mm
Length Connector 17,5kV max	110 mm
Length L	1400 mm
Nominal cross section 12 kV min	50 mm ²
Nominal cross section 12 kV max	95 mm ²
Nominal cross section 17,5 kV min	35 mm ²
Nominal cross section 17,5 kV max	50 mm ²

Logistics data

Article name	CHMPPR3 17kV 35-50
Article number	197658
Delivery scope	Spreader cap
	Thick wall heat shrinkable outer tube with hot melt adhesive
	Oil barrier tubing
	Earthing wire
	Heat shrinkable tubes
	Copper braid tape
	Assembly material
	Pressure spring
	Field control filling tape (blue)
	Sealing tape
	Fire protection wrapping
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311051956

Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	8
Base unit of measure	Piece	Piece
Lenght (mm)	1112	1200
Width (mm)	322	800
Height (mm)	205	1130
Net weight (kg)	6.104	48.832
Gross weight (kg)	6.104	67.032