

Straight-through joint

for belted cables / H-Type cables up to 17.5 kV (MIND)

Hybrid straight-through joints CHMPPR3 are suitable for belted cables and H-Type cables up to 17.5 kV. Suitable for compression connectors.




Product description

|                    |  |
|--------------------|--|
| Article name       | CHMPPR3 17kV 70-240                                |
| Article number     | 197659   |
| Optional accessory | Compression connectors (see Connecting technology) |

|                               |
|-------------------------------|
| Characteristics               |
| Wide cross-section range      |
| Quick, safe and easy assembly |
| Ready for immediate operation |

|                    |
|--------------------|
| Applications       |
| Indoor             |
| Outdoor            |
| Underground        |
| Water              |
| Installation ducts |
| Ductwork           |

Technical data

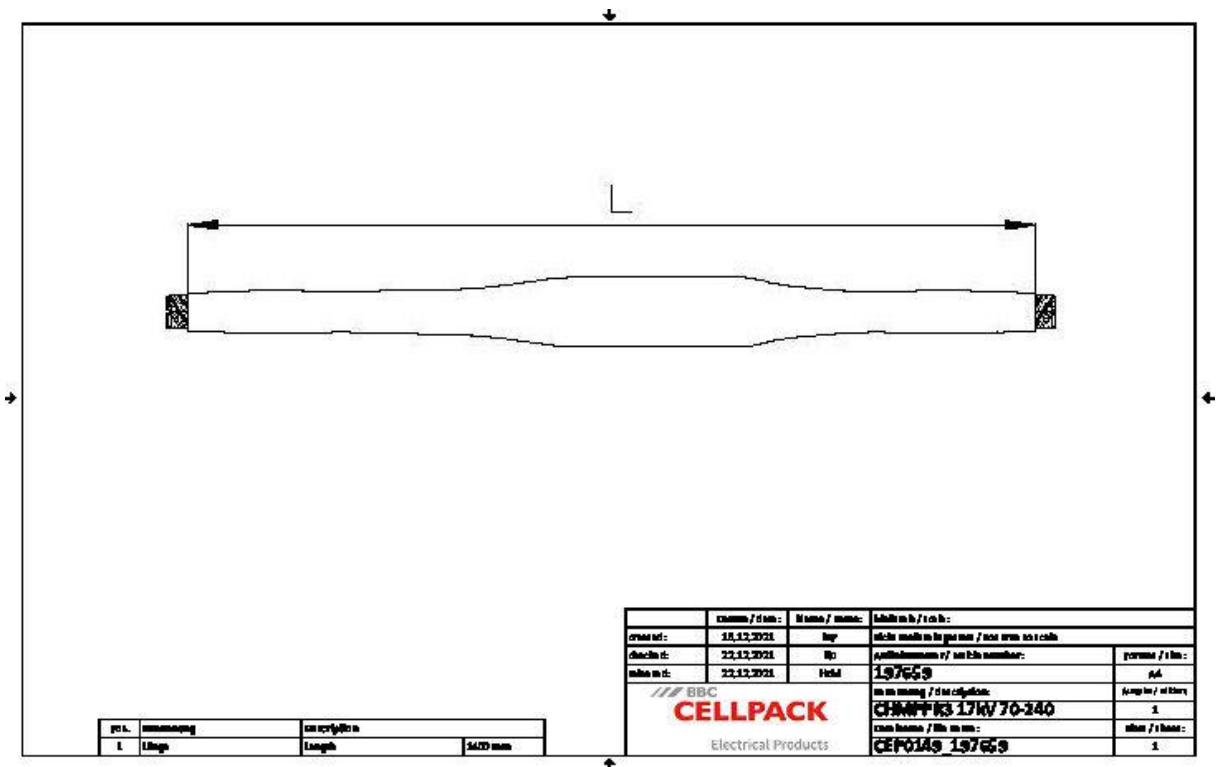

|                                   |   |
|-----------------------------------|---|
| Article name                      | CHMPPR3 17kV 70-240                       |
| Article number                    | 197659                                    |
| Voltage levels                    | U0/U (Um) 6/10 (12) kV - 8,7/15 (17,5) kV |
| Test standards                    | DIN VDE 0278-629-2                        |
| Diameter Connector 12kV max       | 34 mm                                     |
| Diameter Connector 17,5kV max     | 34 mm                                     |
| Length Connector 12kV max         | 145 mm                                    |
| Length Connector 17,5kV max       | 145 mm                                    |
| Length L                          | 1400 mm                                   |
| Nominal cross section 12 kV min   | 95 mm <sup>2</sup>                        |
| Nominal cross section 12 kV max   | 300 mm <sup>2</sup>                       |
| Nominal cross section 17,5 kV min | 70 mm <sup>2</sup>                        |
| Nominal cross section 17,5 kV max | 240 mm <sup>2</sup>                       |

## Logistics data

|                        |  |
|------------------------|--|
| Article name           | CHMPPR3 17kV 70-240  |
| Article number         | 197659   |
| Delivery scope         | Spreader cap   |
|                        | Thick wall heat shrinkable outer tube with hot melt adhesive |
|                        | Oil barrier tubing   |
|                        | Earthing wire  |
|                        | Heat shrinkable tubes  |
|                        | Copper braid tape  |
|                        | Assembly material  |
|                        | Pressure spring  |
|                        | Field control filling tape (blue)                            |
|                        | Sealing tape   |
|                        | Fire protection wrapping                                     |
|                        | Assembly instructions  |
| Shelf life description | Unlimited shelf life   |
| Country of origin      | Germany  |
| Customs tariff number  | 39269097   |
| EAN/GTIN               | 4010311051963  |

## Packaging data

|                             |        |         |
|-----------------------------|--------|---------|
| Alternative unit of measure | Carton | Pal. OW |
| Base quantity               | 1      | 8       |
| Base unit of measure        | Piece  | Piece   |
| Length (mm)                 | 1111   | 1200    |
| Width (mm)                  | 342    | 800     |
| Height (mm)                 | 207    | 1130    |
| Net weight (kg)             | 6.828  | 54.624  |
| Gross weight (kg)           | 6.828  | 72.824  |