

Transition joint

from belted cables / H-Type cables to 3-core polymeric cables

Hybrid transition joints CHMPR3 for transition to one 3-core polymeric-insulated cable, are suitable for belted cables and H-Type cables up to 17.5 kV. The scope of application can be reduced by an appropriate padding set for the mass-impregnated paper cable. Suitable for compression connectors.




Product description

Article name	CHMPR3 17kV 70-240
Article number	197619
Notes	Other transition joints available on request.
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Reliable stress control due to flexible silicone stress control elements
Wide cross-section range
Quick, safe and easy assembly
Ready for immediate operation

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

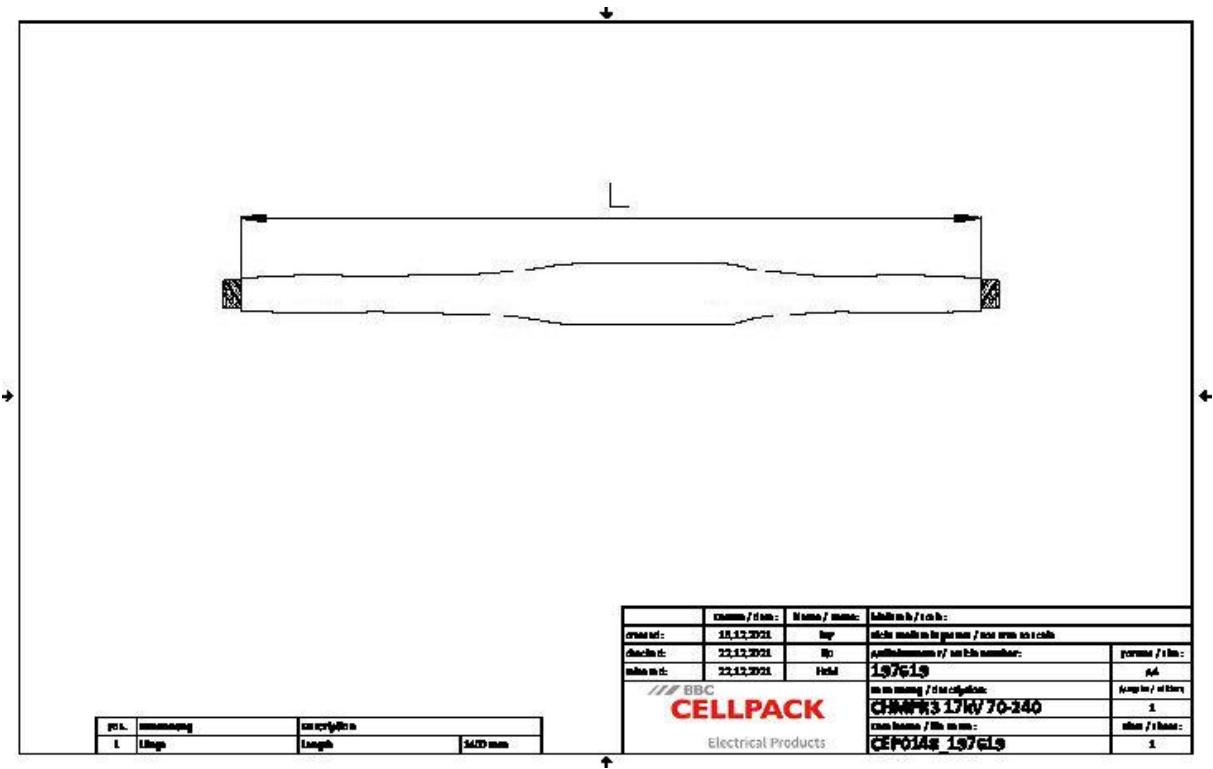

Article name	CHMPR3 17kV 70-240
Article number	197619
Voltage levels	U0/U (Um) 6/10 (12) kV - 8,7/15 (17,5) kV
Test standards	DIN VDE 0278-629-2
Diameter Connector 12kV max	34 mm
Diameter Connector 17,5kV max	34 mm
Length Connector 12kV max	145 mm
Length Connector 17,5kV max	145 mm
Length L	1400 mm
Diameter over core insulation after removal of the outer conductive layer min	17.3 mm
Nominal cross section 12 kV min	95 mm²
Nominal cross section 12 kV max	300 mm²
Nominal cross section 17,5 kV min	70 mm²
Nominal cross section 17,5 kV max	240 mm²

Logistics data

Article name	CHMPR3 17kV 70-240
Article number	197619
Delivery scope	Spreader cap
	Thick wall heat shrinkable outer tube with hot melt adhesive
	Oil barrier tubing
	Silicone field control elements
	Earthing wire
	Heat shrinkable tubes
	Copper braid tape
	Assembly material
	Pressure spring
	Field control filling tape (blue)
	Sealing tape
	Fire protection wrapping
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311051567

Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	8
Base unit of measure	Piece	Piece
Lenght (mm)	1127	1200
Width (mm)	343	800
Height (mm)	245	1130
Net weight (kg)	5.532	44.256
Gross weight (kg)	5.532	62.456