

3-core straight-through joint with screw cable lugs

for connecting from 3-core with three 1-core polymeric cables

Hybrid straight-through joints CHMSV3-1 are suitable for connecting 3-core polymeric cables with three 1-core polymeric cables (PVC, PE, XLPE, EPR). They allow the connection of cables with copper wire screen with different cross sections and conductor materials even with different cable designs concerning the semi-conductive layer (graphite-coated, removable or strippable). With screw connectors.



Product description

Article name	CHMSV3-1 24kV 16-95
Article number	297461
Notes	Straight-through joints with larger cross-section available on request.
Optional accessory	EGA earthing kit for cables with tape screen (see Connecting technology)


Characteristics

Reliable stress control due to flexible silicone stress control elements
For both copper and aluminium conductors
For all cables with copper wire screen
Wide conductor and cross-section range
Quick, safe and easy assembly
Ready for immediate operation
Suitable for a wide range of applications due to integrated screw connector

Applications

Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

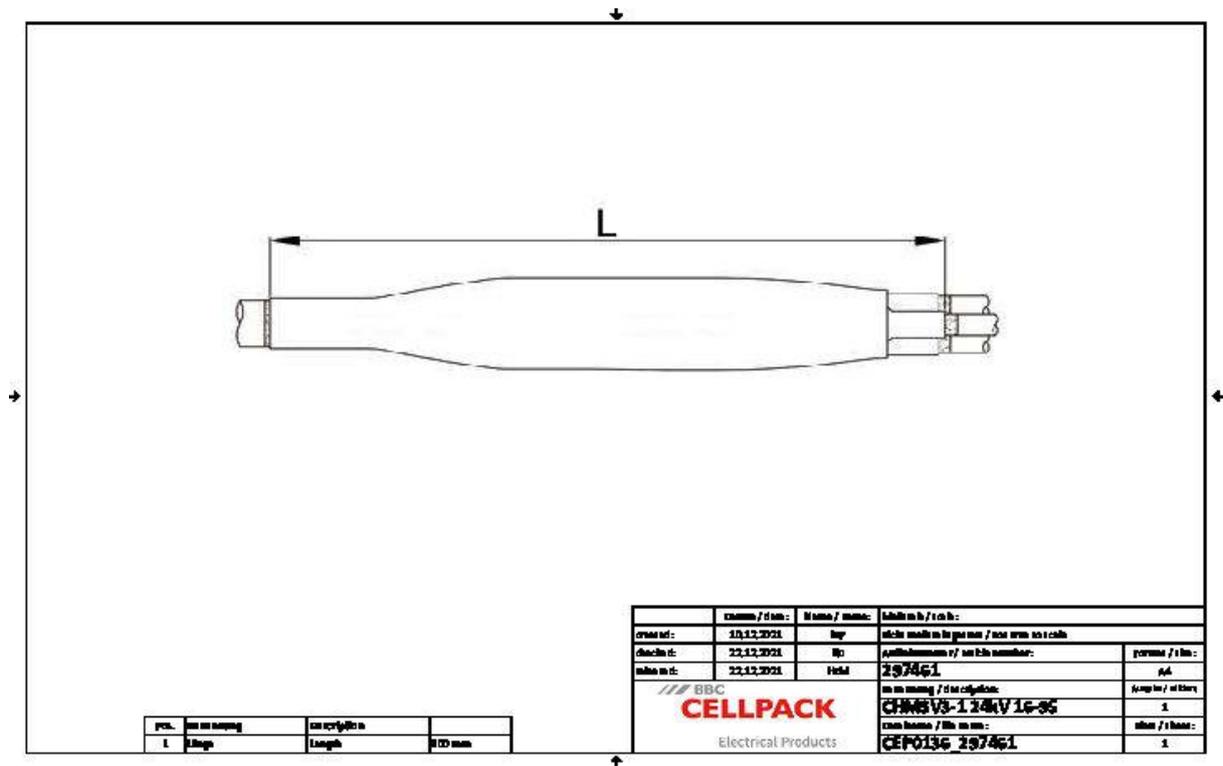

Article name	CHMSV3-1 24kV 16-95
Article number	297461
Voltage levels	U0/U (Um) 12/20 (24) kV - 12,7/22 (24) kV
Test standards	CENELEC HD 629.1
Length L	900 mm
Diameter over core insulation after removal of the outer conductive layer min	14.7 mm
Nominal cross section 24 kV min	16 mm ²
Nominal cross section 24 kV max	95 mm ²

Logistics data

Article name	CHMSV3-1 24kV 16-95
Article number	297461
Delivery scope	Thick wall heat shrinkable insulation tubes Thick wall heat shrinkable outer tube with hot melt adhesive Silicone field control elements Copper braid tape Field control filling tape (blue) Innovative screw connector with conductive cover Screw connector for copper-wire screen Assembly material Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311153766

Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	25
Base unit of measure	Piece	Piece
Lenght (mm)	726	1200
Width (mm)	235	800
Height (mm)	192	1130
Net weight (kg)	3.769	94.225
Gross weight (kg)	3.769	112.425