

## 1-core straight-through joint

with screw connector for 1-core polymeric cables

Hybrid straight-through joints CHMSV are suitable for all 1-core polymeric-insulated cables (PVC, PE, XLPE, EPR). They allow the connection of cables with different cross sections and conductor materials even with different cable designs concerning the semi-conductive layer (graphite-coated, removable or strippable) and screen design (copper wire or tape screen). With screw connector.



### Product description

Article name	CHMSV 17kV 240-400
Article number	258138
Notes	Can be used also for cables $U_m = 7,2$ kV, then the minimum diameter over conductor insulation has to be checked. Straight-through joints with larger cross-section available on request.

#### Characteristics

Reliable stress control due to flexible silicone stress control elements

For both copper and aluminium conductors

For all cables with copper wire or tape screen

Wide conductor and cross-section range

Quick, safe and easy assembly

Ready for immediate operation

Suitable for a wide range of applications due to integrated screw connector

#### Applications

Indoor

Outdoor


Underground

Water

Installation ducts

Ductwork

Technical data

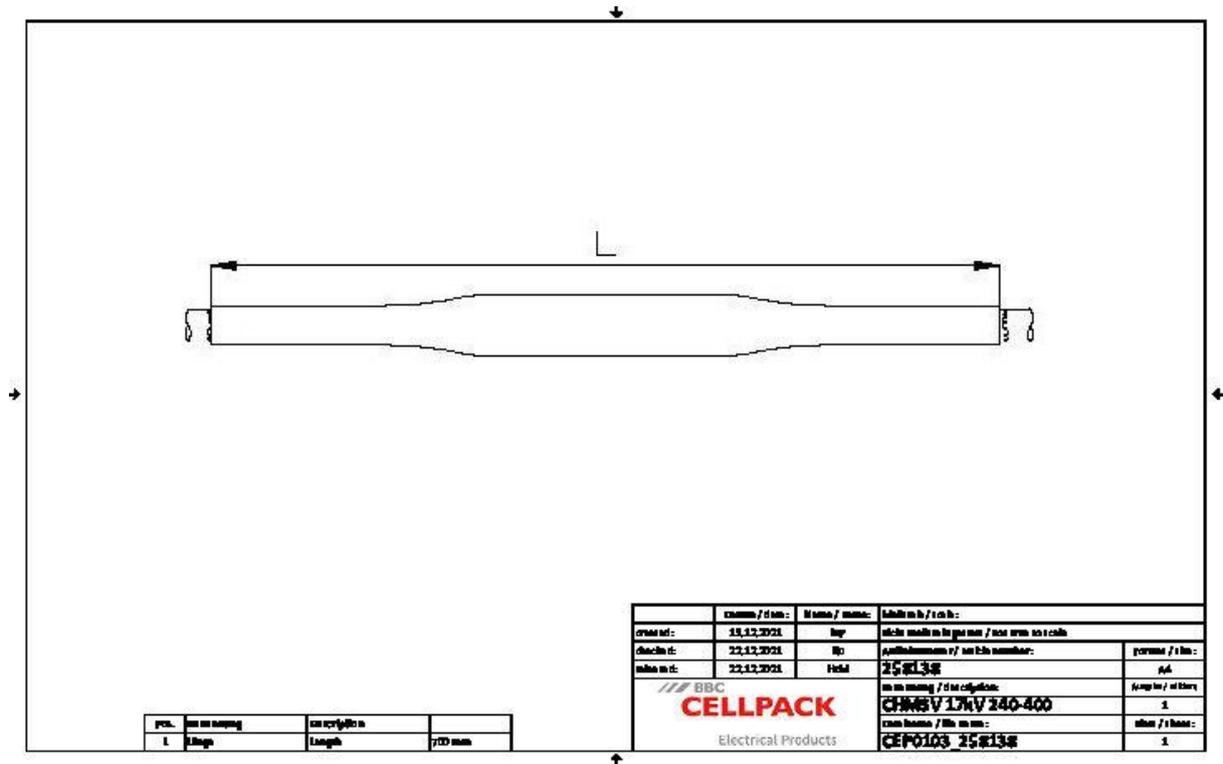

Article name	CHMSV 17kV 240-400
Article number	258138
Voltage levels	U0/U (Um) 8,7/15 (17,5) kV
Test standards	CENELEC HD 629.1
Length L	700 mm
Diameter over core insulation after removal of the outer conductive layer min	24 mm
Nominal cross section 17,5 kV min	240 mm <sup>2</sup>
Nominal cross section 17,5 kV max	400 mm <sup>2</sup>

## Logistics data

Article name	CHMSV 17kV 240-400
Article number	258138
Delivery scope	Thick wall heat shrinkable insulation tubes Thick wall heat shrinkable outer tube with hot melt adhesive Silicone field control elements Copper braid tube Pressure springs Innovative screw connector with conductive cover Field control filling tape (blue) Assembly material Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39269097
EAN/GTIN	4010311139739

## Packaging data

Alternative unit of measure	Carton	Pal. OW
Base quantity	1	25
Base unit of measure	Piece	Piece
Length (mm)	730	1200
Width (mm)	231	800
Height (mm)	188	1130
Net weight (kg)	2.336	58.4
Gross weight (kg)	2.336	76.6