

Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




Product description

Article name	DK-AL-LD 500/20
Article number	194908
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

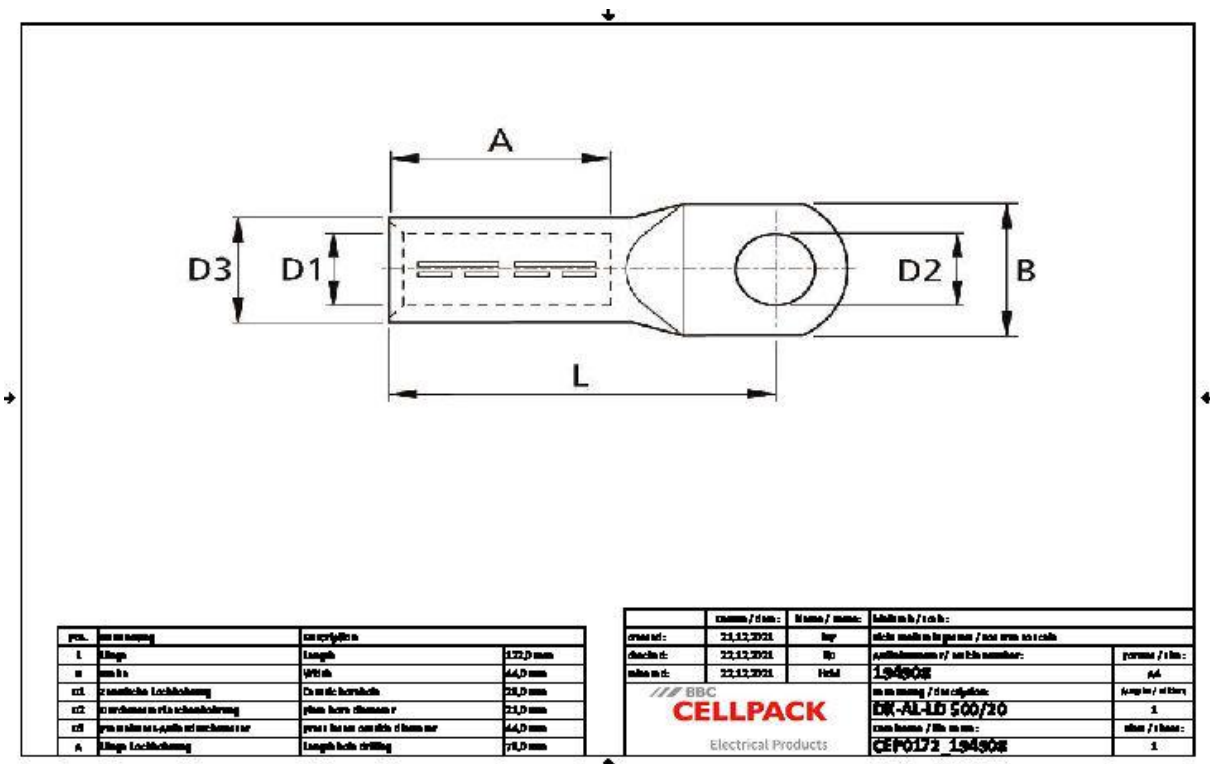

Article name	DK-AL-LD 500/20
Article number	194908
Test standards	DIN 46329
Materials	Blank aluminium
Length L	122 mm
Width B	44 mm
Diameter D1	29 mm
Diameter D2	21 mm
Diameter D3	44 mm
Nominal cross section RM/SM	500 mm ²
Press die code K	44 mm
Length A	79 mm

Logistics data

Article name	DK-AL-LD 500/20
Article number	194908
Delivery scope	Compression cable lug
Country of origin	Czech Republic
Customs tariff number	85369010
EAN/GTIN	4010311053004

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	10
Base unit of measure	Piece	Piece
Lenght (mm)	154	310
Width (mm)	49	155
Height (mm)	47	120
Net weight (kg)	0.344	3.44
Gross weight (kg)	0.344	3.74