

## Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




### Product description

Article name	DK-AL-LD 300/16
Article number	194932
Notes	To be used with suitable crimping tool with DIN inserts

### Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

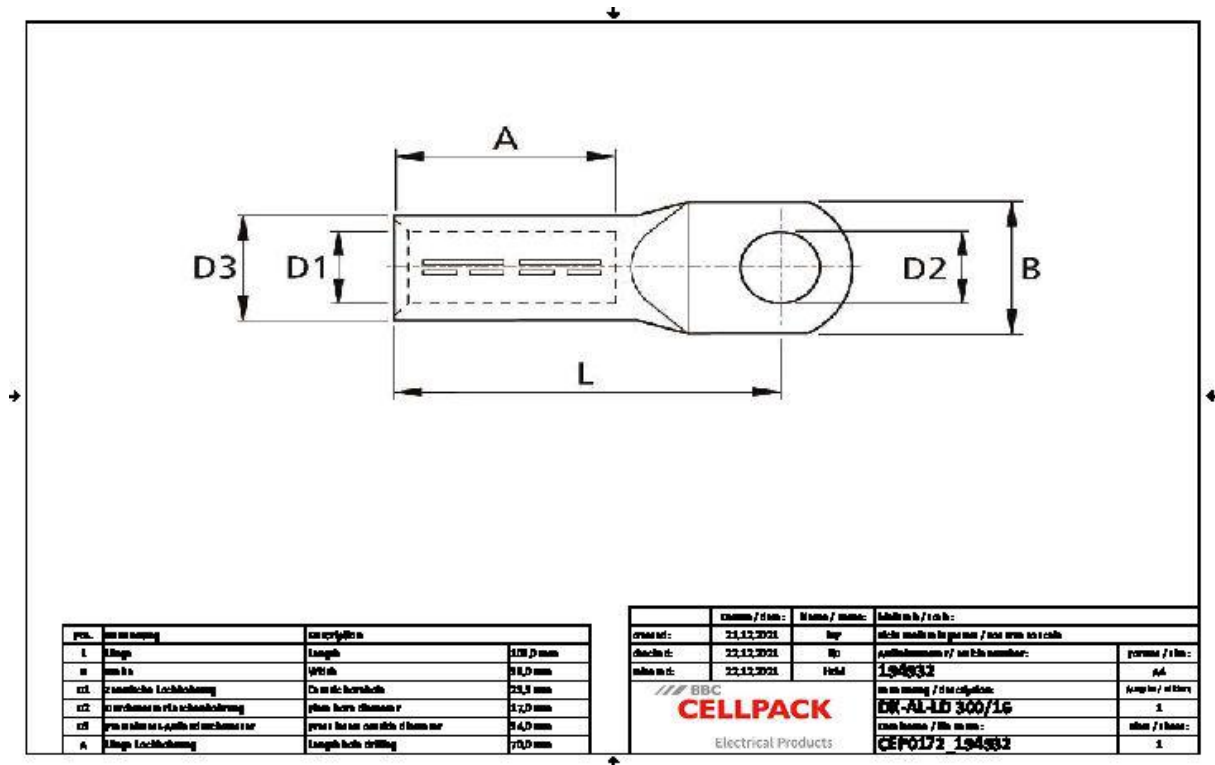

Article name	DK-AL-LD 300/16
Article number	194932
Test standards	DIN 46329
Materials	Blank aluminium
Length L	103 mm
Width B	38 mm
Diameter D1	23.3 mm
Diameter D2	17 mm
Diameter D3	34 mm
Nominal cross section RM/SM	300 mm <sup>2</sup>
Press die code K	34 mm
Length A	70 mm

## Logistics data

Article name	DK-AL-LD 300/16
Article number	194932
Delivery scope	Compression cable lug
Country of origin	Czech Republic
Customs tariff number	85369010
EAN/GTIN	4010311052984

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	25
Base unit of measure	Piece	Piece
Length (mm)	122	290
Width (mm)	30	195
Height (mm)	30	145
Net weight (kg)	0.175	4.375
Gross weight (kg)	0.175	4.675