

Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




Product description

Article name	DK-AL-LD 240/16
Article number	194933
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

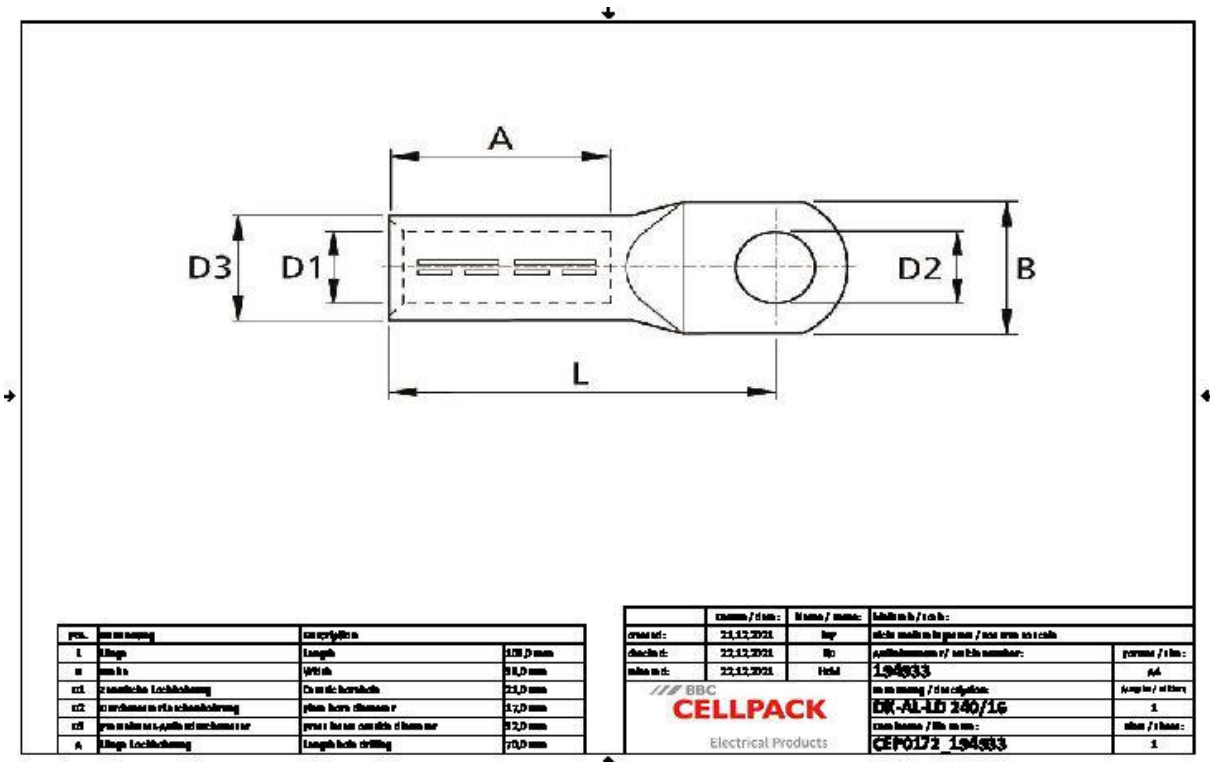

Article name	DK-AL-LD 240/16
Article number	194933
Test standards	DIN 46329
Materials	Blank aluminium
Length L	103 mm
Width B	38 mm
Diameter D1	21 mm
Diameter D2	17 mm
Diameter D3	32 mm
Nominal cross section RM/SM	240 mm ²
Nominal cross section SE	300 mm ²
Press die code K	32 mm
Length A	70 mm

Logistics data

Article name	DK-AL-LD 240/16
Article number	194933
Delivery scope	Compression cable lug
Country of origin	Czech Republic
Customs tariff number	85369010
EAN/GTIN	4010311052977

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	133	290
Width (mm)	39	195
Height (mm)	32	145
Net weight (kg)	0.157	7.85
Gross weight (kg)	0.157	8.15