

Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




Product description

Article name	DK-AL-LD 185/12
Article number	194935
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

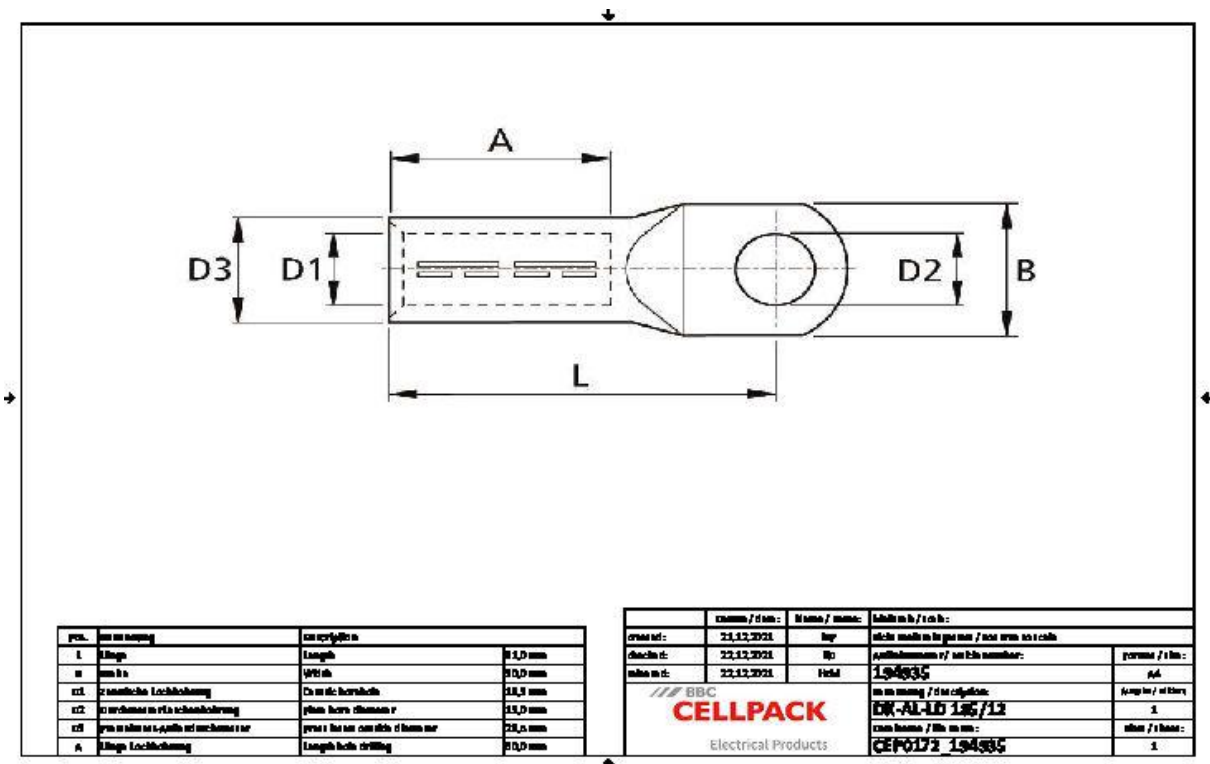

Article name	DK-AL-LD 185/12
Article number	194935
Test standards	DIN 46329
Materials	Blank aluminium
Length L	91 mm
Width B	30 mm
Diameter D1	18.3 mm
Diameter D2	13 mm
Diameter D3	28.5 mm
Nominal cross section RM/SM	185 mm ²
Nominal cross section SE	240 mm ²
Press die code K	28 mm
Length A	60 mm

Logistics data

Article name	DK-AL-LD 185/12
Article number	194935
Delivery scope	Compression cable lug
Country of origin	Czech Republic
Customs tariff number	85369010
EAN/GTIN	4010311052953

Packaging data

Alternative unit of measure	Bag1	Case
Base quantity	1	25
Base unit of measure	Piece	Piece
Lenght (mm)	110	220
Width (mm)	32	155
Height (mm)	30	100
Net weight (kg)	0.11	2.75
Gross weight (kg)	0.11	3.05