

Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




Product description

Article name	DK-AL-LD 120/12
Article number	194939
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

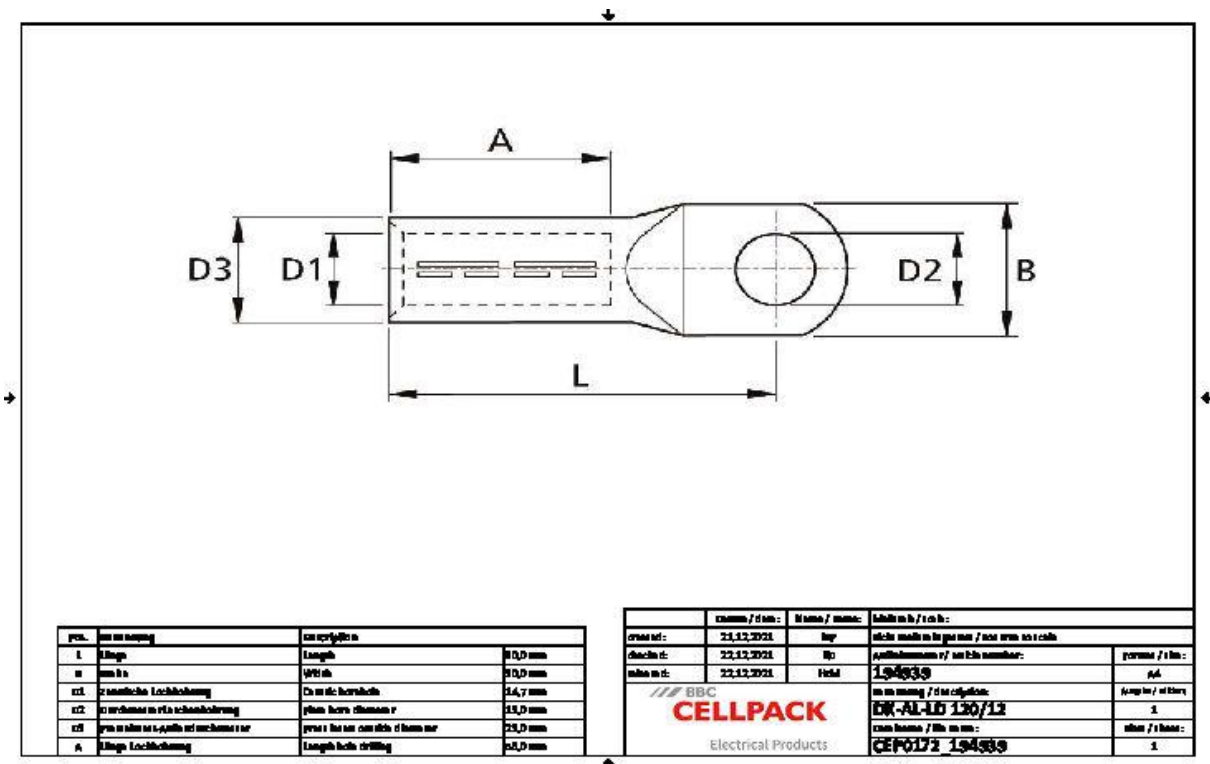

Article name	DK-AL-LD 120/12
Article number	194939
Test standards	DIN 46329
Materials	Blank aluminium
Length L	80 mm
Width B	30 mm
Diameter D1	14.7 mm
Diameter D2	13 mm
Diameter D3	23 mm
Nominal cross section RM/SM	120 mm ²
Nominal cross section SE	150 mm ²
Press die code K	22 mm
Length A	56 mm

Logistics data

Article name	DK-AL-LD 120/12
Article number	194939
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052915

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	101	290
Width (mm)	26	195
Height (mm)	22	145
Net weight (kg)	0.065	3.25
Gross weight (kg)	0.065	3.55