

Compression cable lug Al

longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for aluminium conductors, suitable for indoor and outdoor cable terminations.




Product description

Article name	DK-AL-LD 70/12
Article number	194942
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for aluminium conductor RM/SM (Class 2), RE and SE (Class 1) according to DIN EN 60228 (VDE 0295)

Technical data

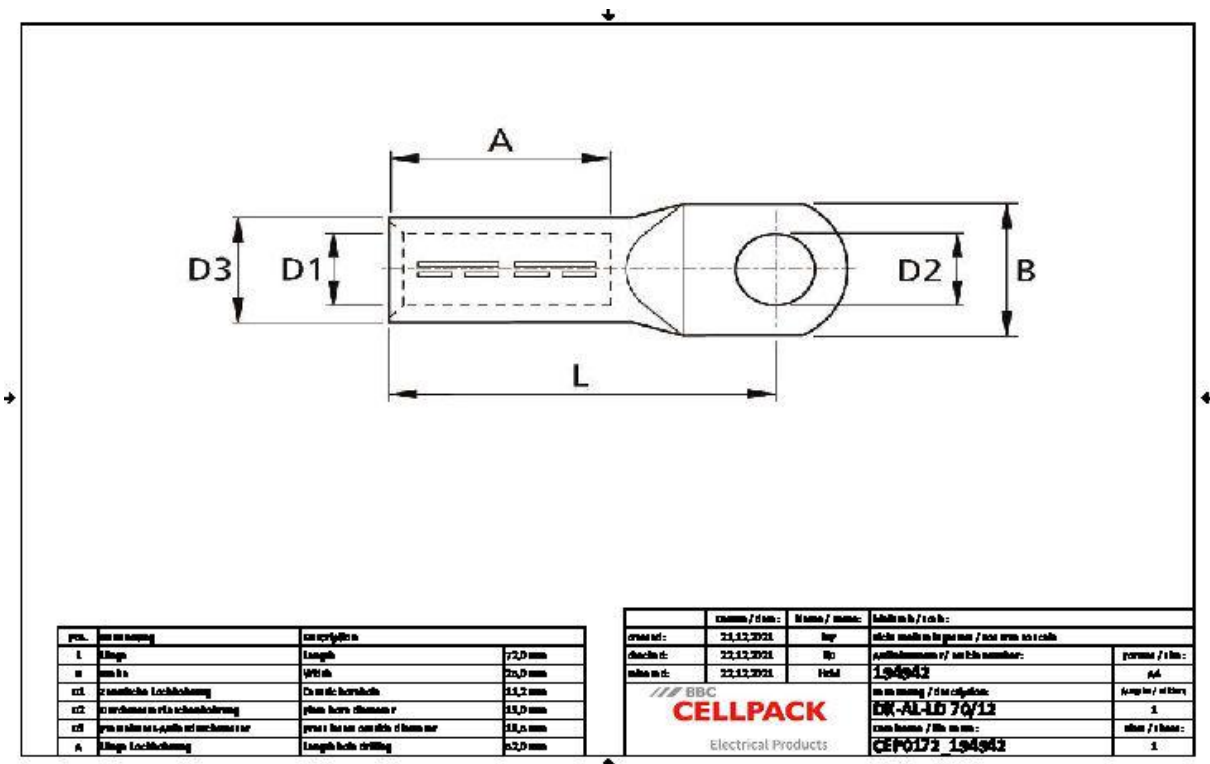

Article name	DK-AL-LD 70/12
Article number	194942
Test standards	DIN 46329
Materials	Blank aluminium
Length L	72 mm
Width B	25 mm
Diameter D1	11.2 mm
Diameter D2	13 mm
Diameter D3	18.5 mm
Nominal cross section RM/SM	70 mm²
Nominal cross section SE	95 mm²
Press die code K	18 mm
Length A	52 mm

Logistics data

Article name	DK-AL-LD 70/12
Article number	194942
Delivery scope	Compression cable lug
Country of origin	Czech Republic
Customs tariff number	85369010
EAN/GTIN	4010311052885

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	90	215
Width (mm)	25	150
Height (mm)	19	100
Net weight (kg)	0.038	1.9
Gross weight (kg)	0.038	2.2