


## Heat shrinkable crimp connector insulated with heat shrinkable tube with adhesive

Durable and reliable connector for application in areas under extreme conditions. Hot melt adhesive completely seals the connection area.

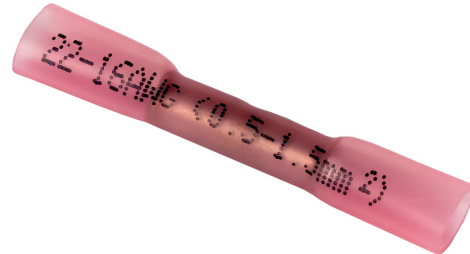

### Product description

Article name	DR 1
Article number	456330
Notes	For a proper conductor/connector contact, use a suitable crimping tool.

Characteristics
100 % waterproof
Superior electrical properties
High mechanical strength

Applications
Indoor

## Technical data

Article name	DR 1
Article number	456330
Selection Note	20 Heat shrinkable crimp connectors
Length L	37 mm
Colours	red
Nominal cross section min	0.5 mm <sup>2</sup>
Nominal cross section max	1.5 mm <sup>2</sup>
Water absorption max	0.5 %
Voltage max	600 V
Tensile strength	10.4 MPa
Heat resistance (168 h at 175 °C)	No fracturing
Heat shock (4 h at 225 °C)	No fracturing
Shrink temperature	> 150 °C
Operation temperature min.	-40 °C
Operation temperature max.	105 °C
Corrosion	none

## Logistics data

Article name	DR 1
Article number	456330
Delivery scope	Heat shrinkable crimp connector
Country of origin	China
Customs tariff number	85369010
EAN/GTIN	4010311199535

## Packaging data

Packaging type	Bag	Carton
Content quantity	20	2000
Unit of measure	Piece	Piece
Length (mm)	145	510
Width (mm)	72	260
Height (mm)	15	235
Net weight (kg)	0.02	2
Gross weight (kg)	0.022	2.3