


Heat shrinkable crimp connector

insulated with heat shrinkable tube with adhesive

Durable and reliable connector for application in areas under extreme conditions. Hot melt adhesive completely seals the connection area.

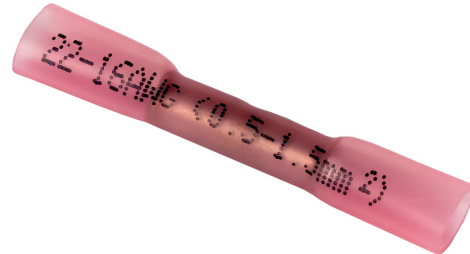

Product description

| | |
|----------------|---|
| Article name | DR 1 |
| Article number | 456333 |
| Notes | For a proper conductor/connector contact, use a suitable crimping tool. |

| |
|--------------------------------|
| Characteristics |
| 100 % waterproof |
| Superior electrical properties |
| High mechanical strength |

| |
|--------------|
| Applications |
| Indoor |

Technical data

| | |
|-----------------------------------|--------------------------------------|
| Article name | DR 1 |
| Article number | 456333 |
| Selection Note | 100 Heat shrinkable crimp connectors |
| Length L | 37 mm |
| Colours | red |
| Nominal cross section min | 0.5 mm ² |
| Nominal cross section max | 1.5 mm ² |
| Water absorption max | 0.5 % |
| Voltage max | 600 V |
| Tensile strength | 10.4 MPa |
| Heat resistance (168 h at 175 °C) | No fracturing |
| Heat shock (4 h at 225 °C) | No fracturing |
| Shrink temperature | > 150 °C |
| Operation temperature min. | -40 °C |
| Operation temperature max. | 105 °C |
| Corrosion | none |

Logistics data

| | |
|-----------------------|---------------------------------|
| Article name | DR 1 |
| Article number | 456333 |
| Delivery scope | Heat shrinkable crimp connector |
| Country of origin | China |
| Customs tariff number | 85369010 |
| EAN/GTIN | 4010311199566 |

Packaging data

| Packaging type | Bag | Carton |
|-------------------|-------|--------|
| Content quantity | 100 | 1000 |
| Unit of measure | Piece | Piece |
| Length (mm) | 110 | 220 |
| Width (mm) | 85 | 160 |
| Height (mm) | 25 | 90 |
| Net weight (kg) | 0.1 | 1 |
| Gross weight (kg) | 0.102 | 1.3 |