


### Heat shrinkable crimp connector

insulated with heat shrinkable tube with adhesive

Durable and reliable connector for application in areas under extreme conditions. Hot melt adhesive completely seals the connection area.

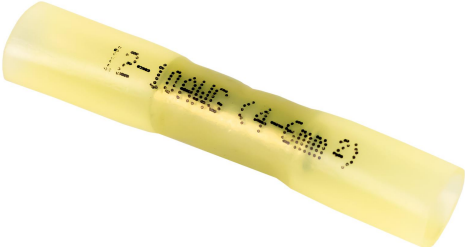

### Product description

Article name	DR 3
Article number	456335
Notes	For a proper conductor/connector contact, use a suitable crimping tool.

Characteristics
100 % waterproof
Superior electrical properties
High mechanical strength

Applications
Indoor

## Technical data

Article name	DR 3
Article number	456335
Selection Note	100 Heat shrinkable crimp connectors
Length L	42 mm
Colours	yellow
Nominal cross section min	4 mm <sup>2</sup>
Nominal cross section max	6 mm <sup>2</sup>
Water absorption max	0.5 %
Voltage max	600 V
Tensile strength	10.4 MPa
Heat resistance (168 h at 175 °C)	No fracturing
Heat shock (4 h at 225 °C)	No fracturing
Shrink temperature	> 150 °C
Operation temperature min.	-40 °C
Operation temperature max.	105 °C
Corrosion	none

## Logistics data

Article name	DR 3
Article number	456335
Delivery scope	Heat shrinkable crimp connector
Country of origin	China
Customs tariff number	85369010
EAN/GTIN	4010311199580

## Packaging data

Packaging type	Bag	Carton
Content quantity	100	1000
Unit of measure	Piece	Piece
Length (mm)	160	220
Width (mm)	100	160
Height (mm)	30	90
Net weight (kg)	0.2	2
Gross weight (kg)	0.202	2.3