


Universal sealing compound

based on butyl rubber

Mouldable thermoplastic sealing compound based on butyl rubber. It can be kneaded easily and accurately in shape and allows fast and high-quality sealing possibilities.

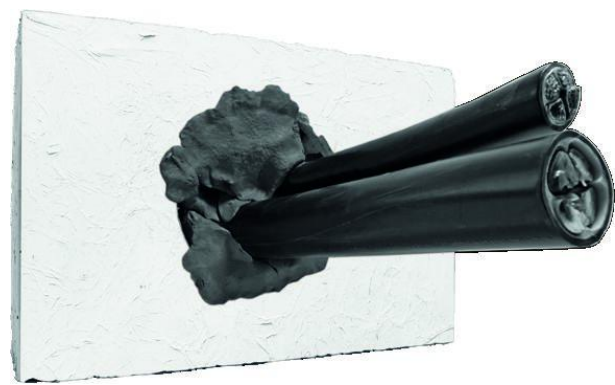

Product description

Article name	DUCT SEAL 2.5 kg
Article number	240357
Optional accessory	Cleaner UNIVERSAL CLEANER 121 (see Accessories)

Characteristics

Firm consistency, good shape retention, can be easily moulded

Excellent adhesion to almost all materials (metal, concrete, stone, wood, glass, ceramic, enamel etc.)

Plastic viscosity

Superior ageing resistance

High resistance to many gases

High resistance to many condensates

Stabilized against UV rays

Halogen-free

Not harmful to the environment

High water resistance

Easy processing

Applications

Sealing of wall ducts, cable ducts, electrical devices, drains and sanitary installations

Technical data

Article name	DUCT SEAL 2.5 kg
Article number	240357
Content	2500 g
Colours	grey
Density	1 g/cm ³
Operation temperature min	-40 °C
Operation temperature max	100 °C
Short-term heat resistance	120 °C

Logistics data

Article name	DUCT SEAL 2.5 kg
Article number	240357
Delivery scope	Universal sealing compound
Country of origin	Germany
Customs tariff number	40059100
EAN/GTIN	4010311127965

Packaging data

Alternative unit of measure	Bag1	Carton	Pal. OW
Base quantity	1	10	120
Base unit of measure	Piece	Piece	Piece
Length (mm)	390	390	1200
Width (mm)	241	241	800
Height (mm)	60	190	1000
Net weight (kg)	2.516	25.16	301.92
Gross weight (kg)	2.516	25.46	320.12