

Compression connector Cu

according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.




Product description

Article name	DV-CU-V 6
Article number	125895
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Connector for RM/SM (Class 2) copper conductors
according to DIN EN 60228 (VDE 0295)

Technical data

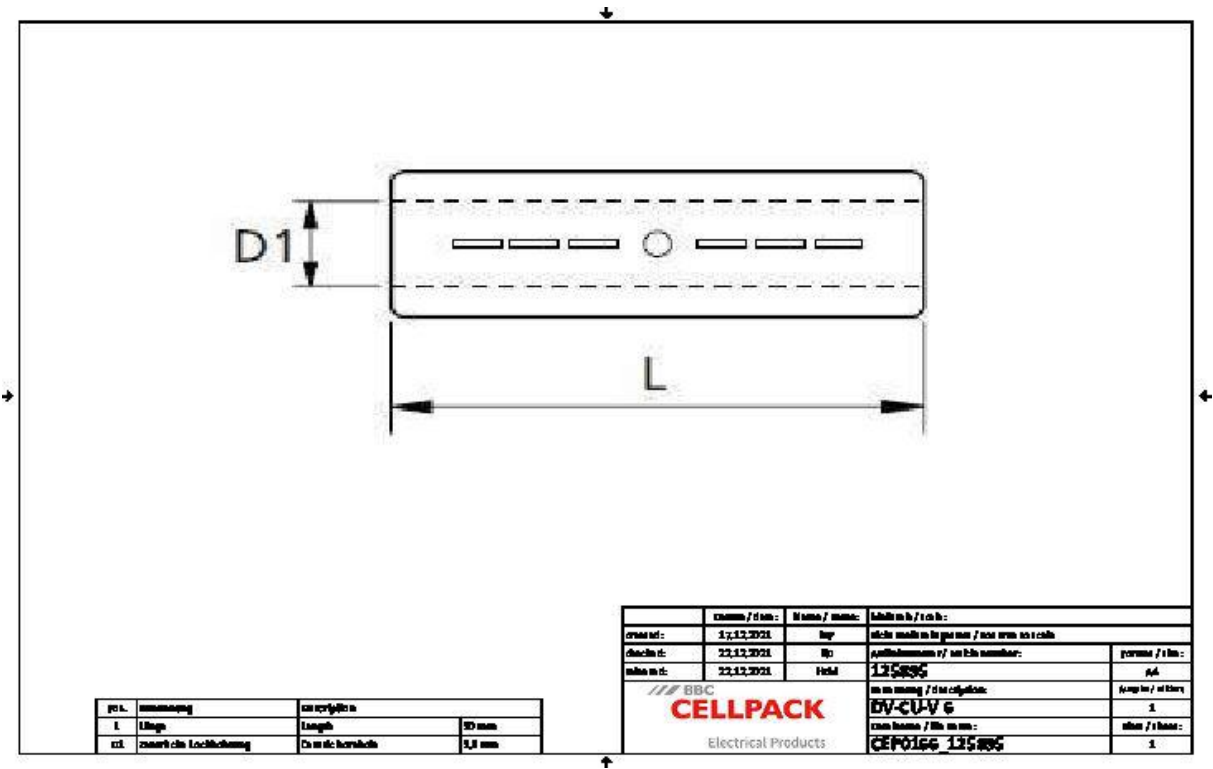

Article name	DV-CU-V 6
Article number	125895
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	30 mm
Diameter D1	3.8 mm
Nominal cross section min	6 mm ²
Nominal cross section max	6 mm ²
Press die code K	5 mm

Logistics data

Article name	DV-CU-V 6
Article number	125895
Delivery scope	Compression connectors
Country of origin	Germany
Customs tariff number	85369010
EAN/GTIN	4010311053011

Packaging data

Alternative unit of measure	Bag1	Case
Base quantity	1	100
Base unit of measure	Piece	Piece
Lenght (mm)	30	83
Width (mm)	5	68
Height (mm)	5	58
Net weight (kg)	0.003	0.3
Gross weight (kg)	0.003	0.6