

Compression connector Cu  
according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)  
for copper conductors, suitable for joints.




Product description

Article name	DV-CU-V 10
Article number	125950
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

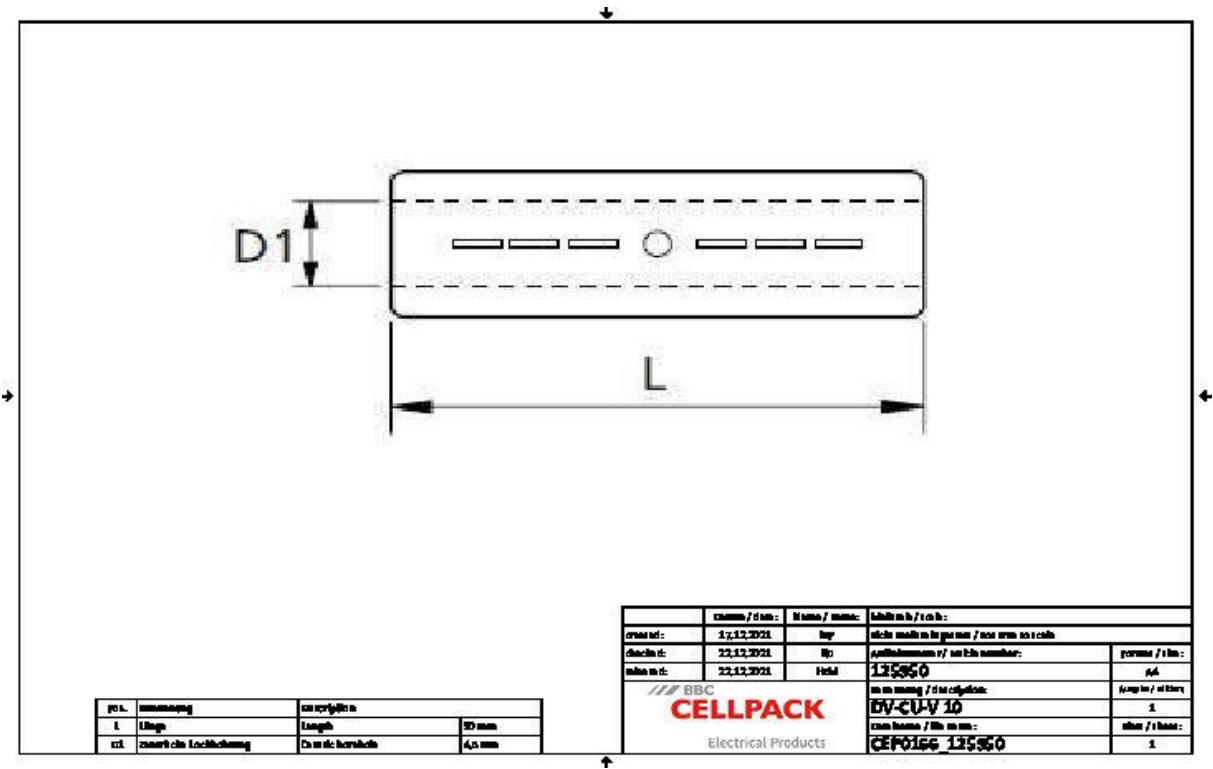

Article name	DV-CU-V 10
Article number	125950
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	30 mm
Diameter D1	4.5 mm
Nominal cross section min	10 mm <sup>2</sup>
Nominal cross section max	10 mm <sup>2</sup>
Press die code K	6 mm

## Logistics data

Article name	DV-CU-V 10
Article number	125950
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053028

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	100
Base unit of measure	Piece	Piece
Lenght (mm)	30	97
Width (mm)	6	97
Height (mm)	6	49
Net weight (kg)	0.003	0.3
Gross weight (kg)	0.003	0.6