

Compression connector Cu

according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.




Product description

Article name	DV-CU-V 120
Article number	125957
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Connector for RM/SM (Class 2) copper conductors
according to DIN EN 60228 (VDE 0295)

Technical data

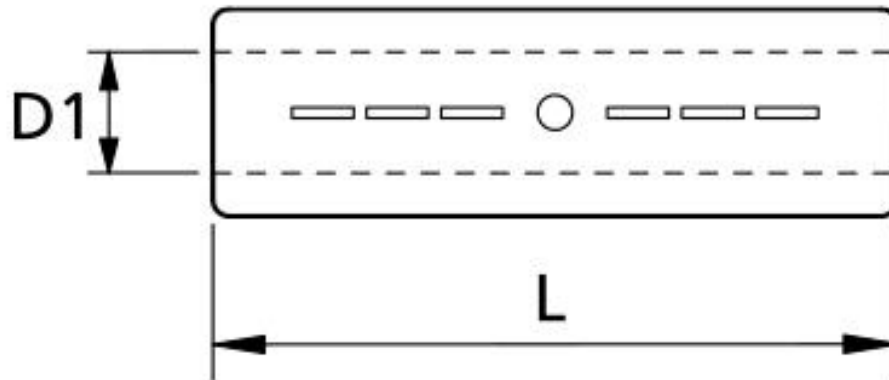

Article name	DV-CU-V 120
Article number	125957
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	70 mm
Diameter D1	15.5 mm
Nominal cross section min	120 mm ²
Nominal cross section max	120 mm ²
Press die code K	20 mm

Logistics data

Article name	DV-CU-V 120
Article number	125957
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053097

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	50
Unit of measure	Piece	Piece
Length (mm)	67	195
Width (mm)	20	145
Height (mm)	20	97
Net weight (kg)	0.098	4.9
Gross weight (kg)	0.098	5.3