

Compression connector Cu

according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)
for copper conductors, suitable for joints.




Product description

Article name	DV-CU-V 150
Article number	125958
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Connector for RM/SM (Class 2) copper conductors
according to DIN EN 60228 (VDE 0295)

Technical data

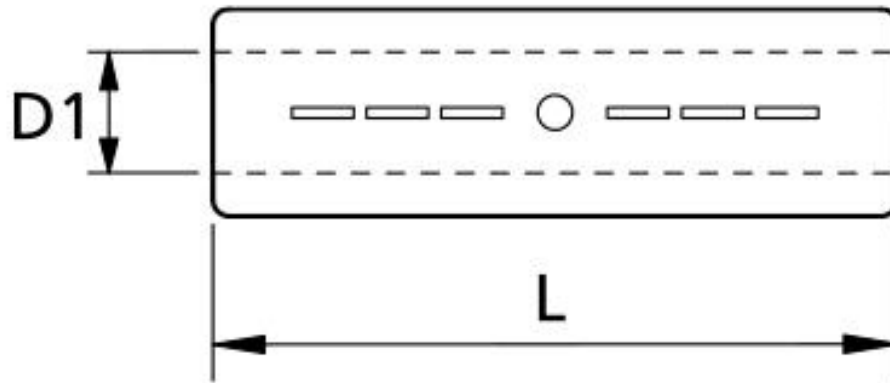

Article name	DV-CU-V 150
Article number	125958
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	80 mm
Diameter D1	17 mm
Nominal cross section min	150 mm ²
Nominal cross section max	150 mm ²
Press die code K	22 mm

Logistics data

Article name	DV-CU-V 150
Article number	125958
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053103

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	50
Unit of measure	Piece	Piece
Lenght (mm)	77	195
Width (mm)	23	145
Height (mm)	23	145
Net weight (kg)	0.144	7.2
Gross weight (kg)	0.144	7.5