

## Compression connector Cu

according to DIN 46267 without separator for low voltage

Strain-relieving connector (hexagonally compressed)  
for copper conductors, suitable for joints.




### Product description

Article name	DV-CU-V 240
Article number	125960
Notes	To be used with suitable crimping tool with DIN inserts

### Applications

Connector for RM/SM (Class 2) copper conductors  
according to DIN EN 60228 (VDE 0295)

Technical data

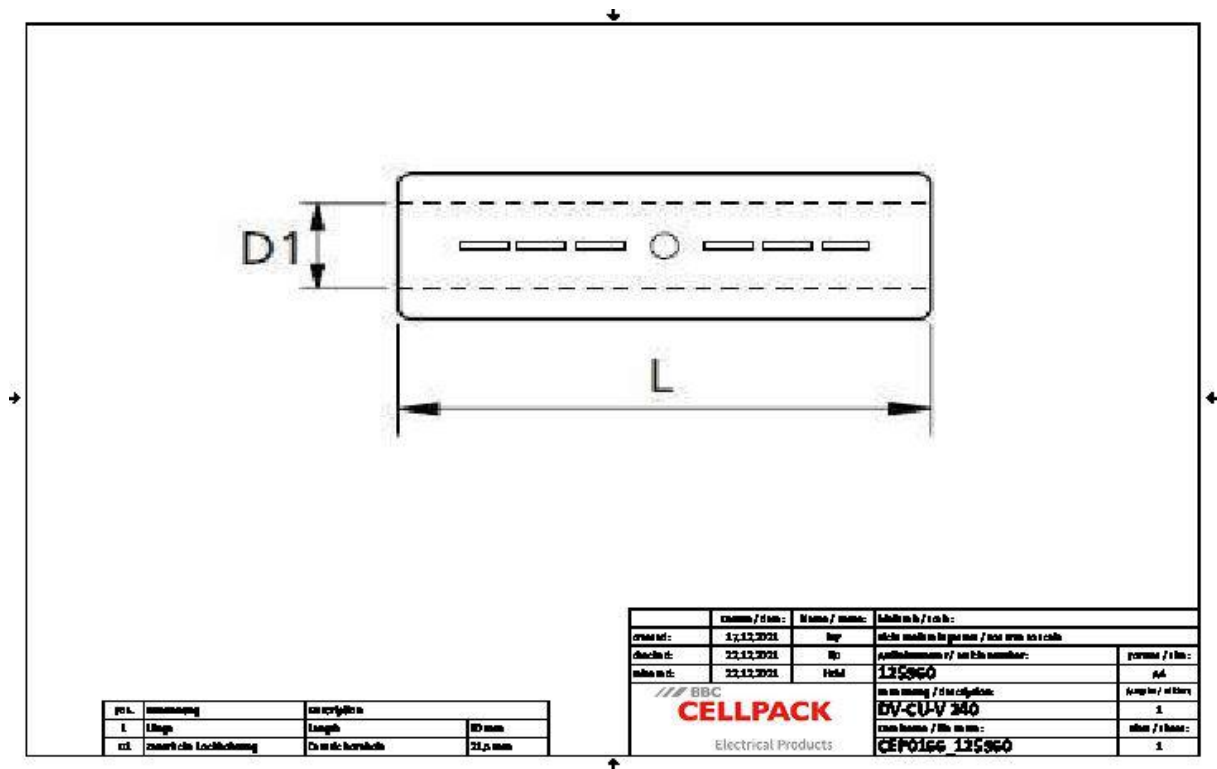

Article name	DV-CU-V 240
Article number	125960
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	90 mm
Diameter D1	21.5 mm
Nominal cross section min	240 mm <sup>2</sup>
Nominal cross section max	240 mm <sup>2</sup>
Press die code K	28 mm

## Logistics data

Article name	DV-CU-V 240
Article number	125960
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053127

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Length (mm)	91	295
Width (mm)	29	185
Height (mm)	25	145
Net weight (kg)	0.232	11.6
Gross weight (kg)	0.232	11.9