

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 25
Article number	125898
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

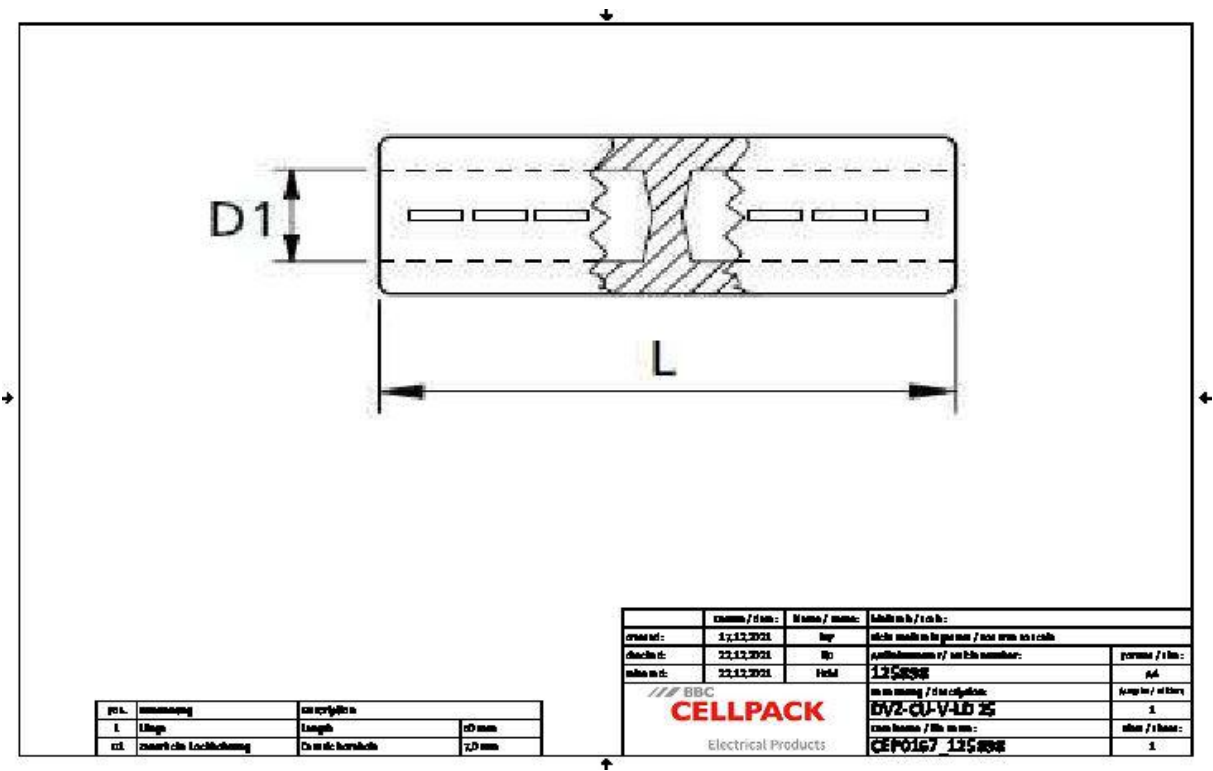

Article name	DVZ-CU-V-LD 25
Article number	125898
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	50 mm
Diameter D1	7 mm
Nominal cross section min	25 mm²
Nominal cross section max	25 mm²
Press die code K	10 mm

Logistics data

Article name	DVZ-CU-V-LD 25
Article number	125898
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053226

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	100
Base unit of measure	Piece	Piece
Lenght (mm)	55	97
Width (mm)	10	97
Height (mm)	10	49
Net weight (kg)	0.024	2.4
Gross weight (kg)	0.024	2.7