

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 35
Article number	125899
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

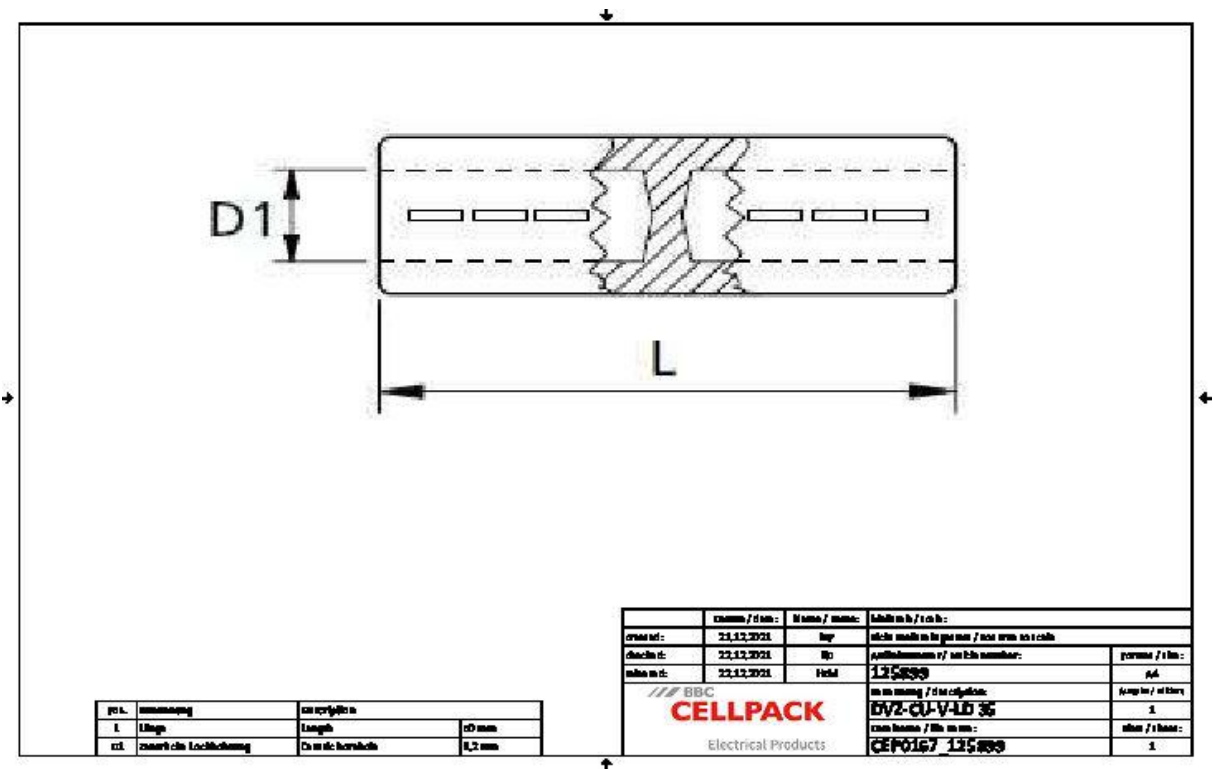

Article name	DVZ-CU-V-LD 35
Article number	125899
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	50 mm
Diameter D1	8.2 mm
Nominal cross section min	35 mm ²
Nominal cross section max	35 mm ²
Press die code K	12 mm

Logistics data

Article name	DVZ-CU-V-LD 35
Article number	125899
Delivery scope	Compression connectors
Country of origin	Germany
Customs tariff number	85369010
EAN/GTIN	4010311053233

Packaging data

Alternative unit of measure	Bag1	Case
Base quantity	1	25
Base unit of measure	Piece	Piece
Length (mm)	47	90
Width (mm)	13	82
Height (mm)	13	55
Net weight (kg)	0.031	0.775
Gross weight (kg)	0.031	1.075