

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 95
Article number	125902
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

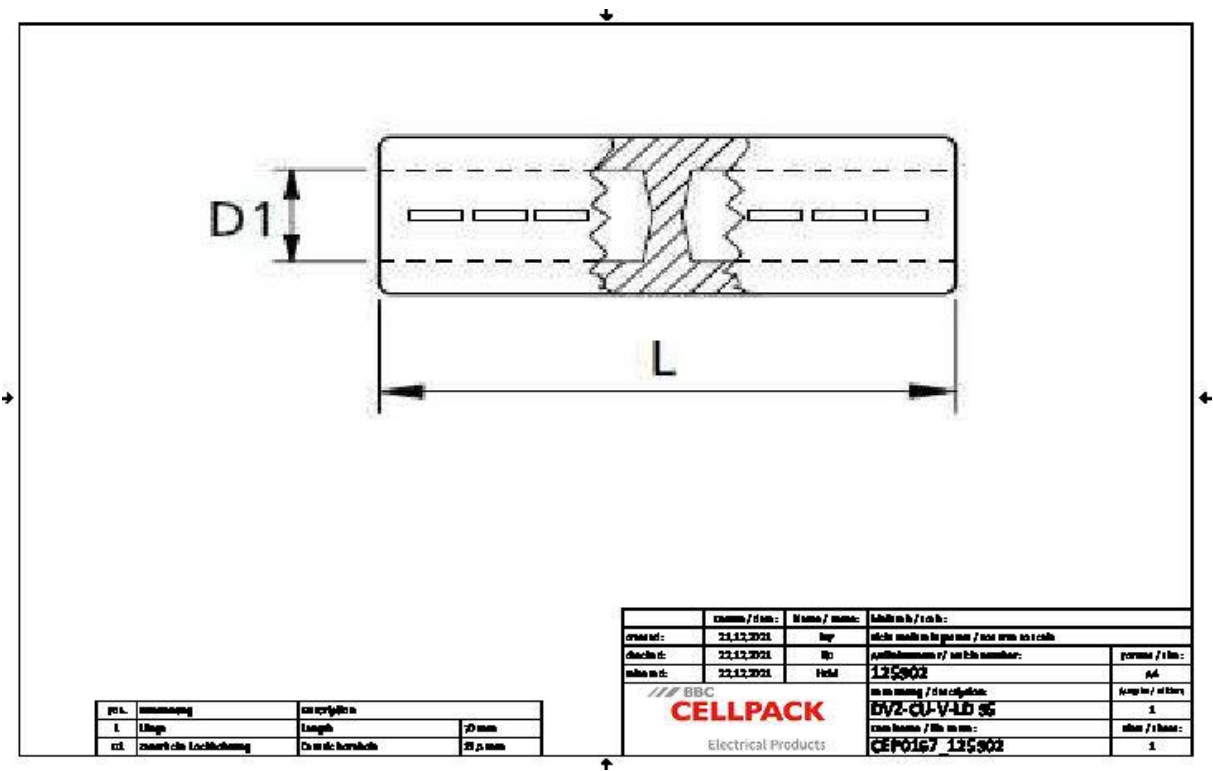

Article name	DVZ-CU-V-LD 95
Article number	125902
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	70 mm
Diameter D1	13.5 mm
Nominal cross section min	95 mm ²
Nominal cross section max	95 mm ²
Press die code K	18 mm

Logistics data

Article name	DVZ-CU-V-LD 95
Article number	125902
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053264

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	72	195
Width (mm)	20	145
Height (mm)	20	97
Net weight (kg)	0.103	5.15
Gross weight (kg)	0.103	5.45