

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 120
Article number	125903
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

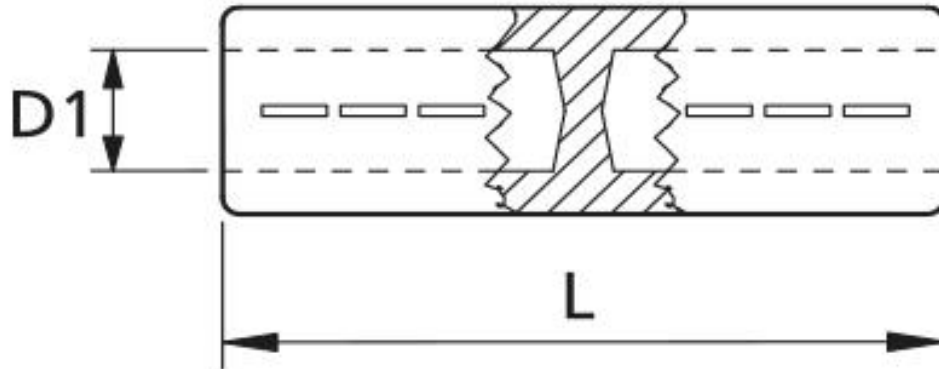

Article name	DVZ-CU-V-LD 120
Article number	125903
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	70 mm
Diameter D1	15.5 mm
Nominal cross section min	120 mm ²
Nominal cross section max	120 mm ²
Press die code K	20 mm

Logistics data

Article name	DVZ-CU-V-LD 120
Article number	125903
Delivery scope	Compression connectors
Country of origin	Slovakia
Customs tariff number	85369010
EAN/GTIN	4010311053271

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	5
Unit of measure	Piece	Piece
Lenght (mm)	67	83
Width (mm)	21	68
Height (mm)	21	58
Net weight (kg)	0.1	0.5
Gross weight (kg)	0.1	0.8