

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 150
Article number	125904
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

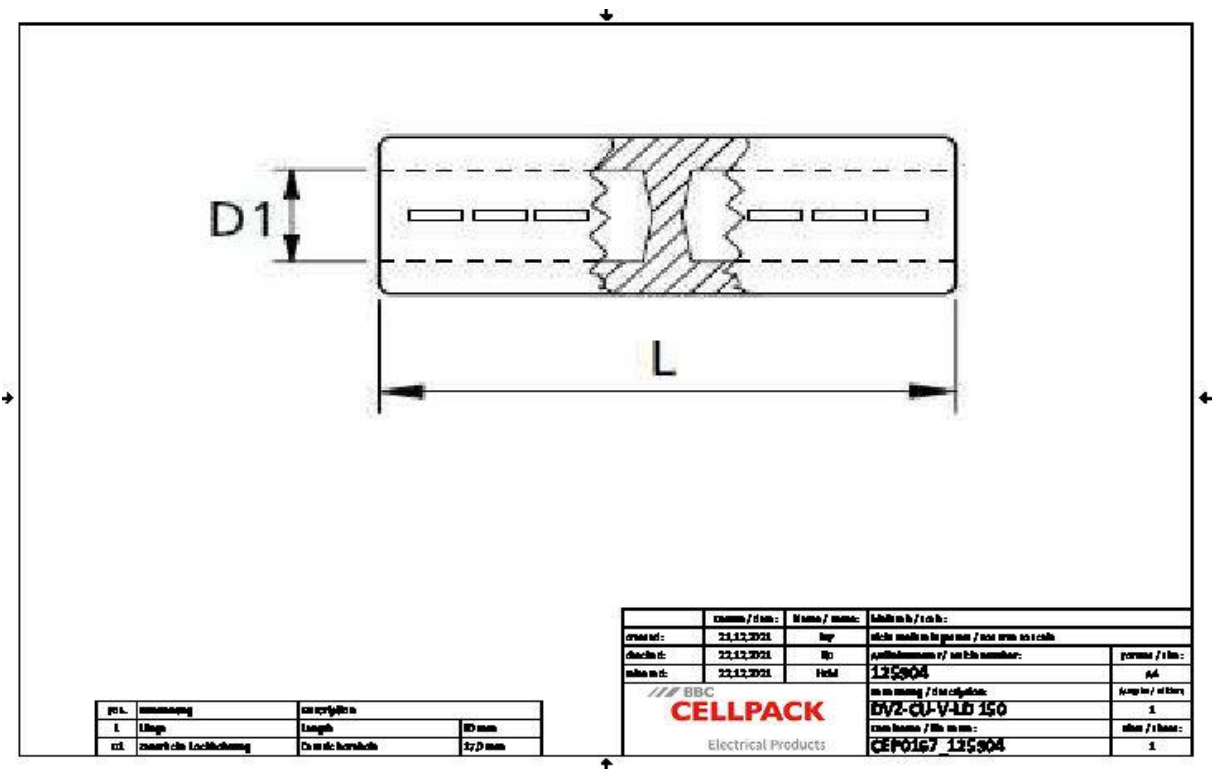

Article name	DVZ-CU-V-LD 150
Article number	125904
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	80 mm
Diameter D1	17 mm
Nominal cross section min	150 mm ²
Nominal cross section max	150 mm ²
Press die code K	22 mm

Logistics data

Article name	DVZ-CU-V-LD 150
Article number	125904
Delivery scope	Compression connectors
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311053288

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	82	200
Width (mm)	22	150
Height (mm)	22	100
Net weight (kg)	0.171	8.55
Gross weight (kg)	0.171	8.85