

Compression connector Cu
according to DIN 46267 with separator for low voltage

Strain-relieving connector (hexagonally compressed)
with a separator for copper conductors, suitable for
joints.




Product description

Article name	DVZ-CU-V-LD 240
Article number	125906
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Especially for transition joints and pot end joints
Connector for RM/SM (Class 2) copper conductors according to DIN EN 60228 (VDE 0295)

Technical data

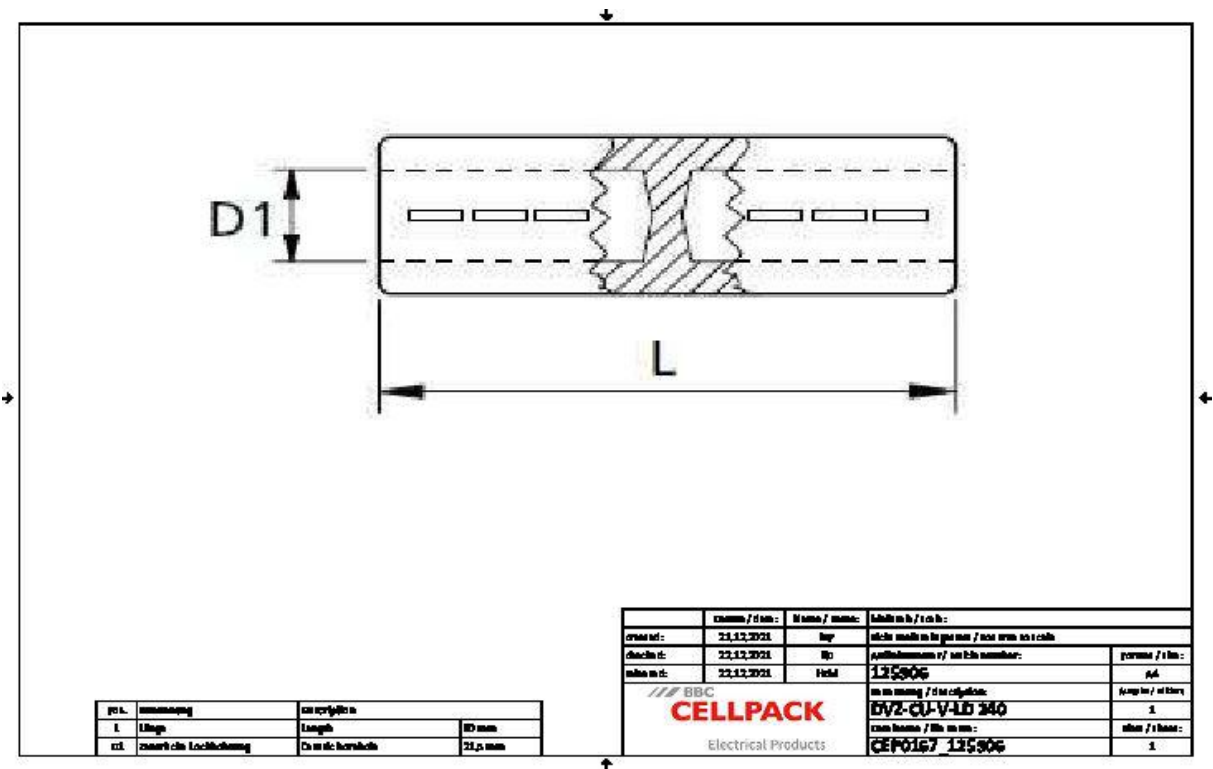

Article name	DVZ-CU-V-LD 240
Article number	125906
Test standards	DIN 46267-1
Materials	Copper tin-plated
Length L	90 mm
Diameter D1	21.5 mm
Nominal cross section min	240 mm ²
Nominal cross section max	240 mm ²
Press die code K	28 mm

Logistics data

Article name	DVZ-CU-V-LD 240
Article number	125906
Delivery scope	Compression connectors
Country of origin	Slovakia
Customs tariff number	85369010
EAN/GTIN	4010311053301

Packaging data

Alternative unit of measure	Bag1	Case	Carton
Base quantity	1	5	45
Base unit of measure	Piece	Piece	Piece
Lenght (mm)	87	136	280
Width (mm)	28	82	180
Height (mm)	28	60	160
Net weight (kg)	0.242	1.21	10.89
Gross weight (kg)	0.242	1.51	11.19