

Gel box

with WAGO COMPACT Inline Connectors

Gel filled housings for easy, fast and safe moisture protection of WAGO COMPACT Inline splicing connectors with lever



Product description

Article name	EASY-PROTECT-BULK Inline/3/4
Article number	457773
Notes	Not reusable
Copyright	WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH

Characteristics

Protects the splicing connector against moisture and water ingress according to IPX8

VDE type-tested system according to EN 60998-2 for approval in conjunction with WAGO COMPACT- Inline Splicing Connectors with lever type 221

Rigid, label-free and silicone-free gel

UV-resistant housing, robust and re-accessible housing

Quick, safe and easy assembly

Ready to use immediately


Applications

Indoor and Outdoor

Can be used in the low-voltage range without an additional housing

Can be used in the low-voltage range with additional housing (double insulation / observe protection class II)

Technical data

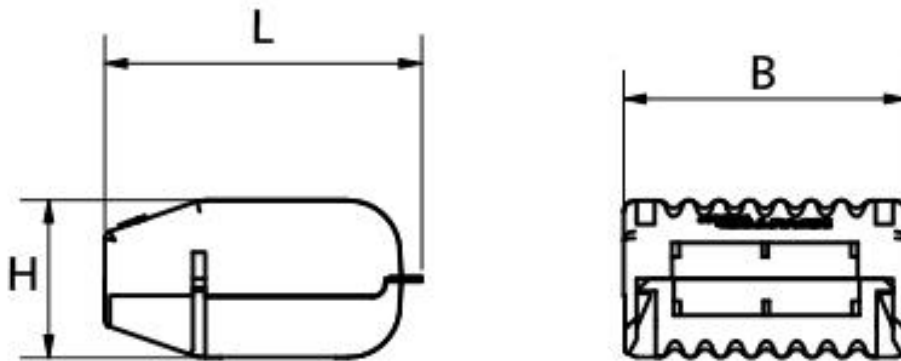

Article name	EASY-PROTECT-BULK Inline/3/4
Article number	457773
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 60998-2
Nominal cross section RM min	0.2 mm ²
Nominal cross section RM max	2.5 mm ²
Nominal cross section RE min	0.2 mm ²
Nominal cross section RE max	4 mm ²
Housing type	3
Number of housing	12 Pieces
Connector type	221-2411
Number of connector	36 Pieces
Length L	41.7 mm
Width B	56.9 mm
Height H	17.8 mm
IP protection class	IPX8
IP protection class (associated standard)	IEC 60529
Housing colour	black
Housing material	Polypropylene
Closure type	Latching
Wiring direction	Two-sided
Gel colour	Translucent amber
Gel Material	Polyurethan
Voltage range	450 V
Voltage range (associated standard)	IEC 60998-2
Flammability class housing	V2
Flammability class housing (associated standard)	UL 94
Rated surge voltage	4 kV
Rated surge voltage (associated standard)	IEC 60998-2
Rated current	32 A
Rated current WAGO COMPACT splicing connector type 221	41 A

Rated current (associated standard)	IEC 60998-2
Ambient temperature (operation)	85 °C
Ambient temperature (operation) (associated standard)	IEC 60998-2
Operating temperature range max	105 °C
Operating temperature range (associated standard)	IEC 60998-2
Mounting temperature min	0 °C
Mounting temperature max	40 °C
Dielectric strength	≥ 15 kV/mm
Dielectric strength (associated standard)	IEC 60243-1

Logistics data

Article name	EASY-PROTECT-BULK Inline/3/4
Article number	457773
Delivery scope	Pre-filled gel box
	WAGO COMPACT- Inline Splicing Connectors type 221
Shelf life description	Unlimited shelf life
Storage temperatur max	40 °C
Storage temperatur min	0 °C
Country of origin	Italy
Customs tariff number	85369010
EAN/GTIN	4010311201641

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	256
Unit of measure	Piece	Piece
Lenght (mm)	278	1200
Width (mm)	190	800
Height (mm)	61	550
Net weight (kg)	0.52	133.12
Gross weight (kg)	0.52	151.32