

Earthing set for cable terminations

for cables with tape screen and/or armouring for cable terminations

EGA earthing set for cable terminations for 1-core cables with copper tape or aluminium screen and for unarmoured 3-core cables. Kit components: 3 flat-rolled copper earth braids and 3 pressure springs.



Product description

Article name	EGA 25-3
Article number	143505
Notes	Additional pressure springs RF (ZR1/ZR2) for armoured cables to be ordered separately (see Accessories).


Characteristics

- Quick, safe and easy assembly
- Superior electrical properties
- High mechanical strength

Applications

- Earthing continuity and earth bonding
- For cast resin, heat shrinkable and slip-on cable accessories
- Enables solder-free electrical connection of metal cable components (screen, armouring, metal sheath)

Technical data

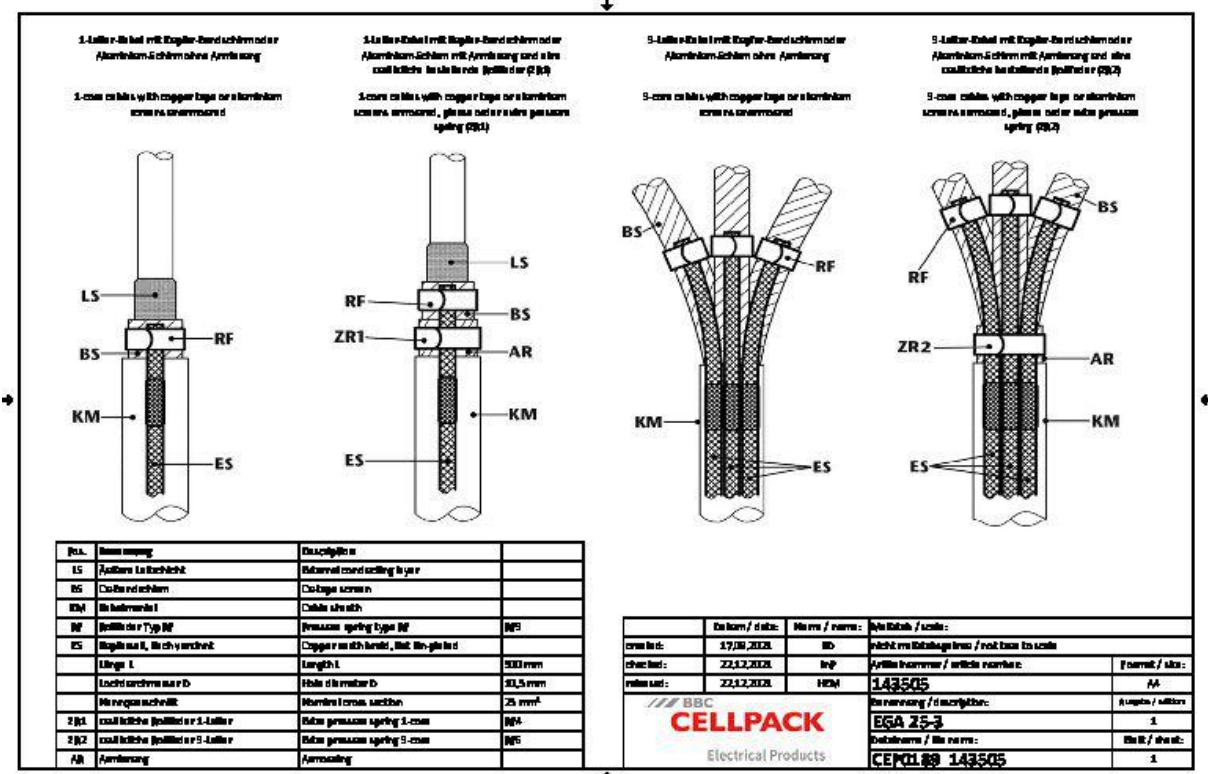

Article name	EGA 25-3
Article number	143505
Pressure spring type	RF3
Diameter hole Copper earth braid	10.5 mm
Nominal cross section Copper earth braid	25 mm ²
Additional pressure spring ZR1	RF4
Additional pressure spring ZR2	RF6
Length L	500 mm
Nominal cross section 7,2 kV min	150 mm ²
Nominal cross section 7,2 kV max	500 mm ²
Nominal cross section 12 kV min	120 mm ²
Nominal cross section 12 kV max	500 mm ²
Nominal cross section 17,5 kV min	95 mm ²
Nominal cross section 17,5 kV max	300 mm ²
Nominal cross section 24 kV min	70 mm ²
Nominal cross section 24 kV max	300 mm ²
Nominal cross section 36 kV min	70 mm ²
Nominal cross section 36 kV max	240 mm ²

Logistics data

Article name	EGA 25-3
Article number	143505
Delivery scope	1 Set for 3 phases: Copper braid earth tapes, pressure springs RF
Country of origin	Germany
Customs tariff number	85444995
EAN/GTIN	4010311050225

Packaging data

Alternative unit of measure	Bag1	Pal. OW
Base quantity	1	300
Base unit of measure	Piece	Piece
Lenght (mm)	293	1200
Width (mm)	147	800
Height (mm)	25	1130
Net weight (kg)	0.424	127.2
Gross weight (kg)	0.424	145.4