

Cast resin straight-through joint
for polymeric cables and control cables and signal cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE, XLPE and EPR (e.g. N(A)YY, NYM, TT). With hydrolysis resistance PUR cast resin GG. Suitable for compression or screw connectors on copper and aluminium conductors.



Product description

Article name	M 2.5 GG
Article number	353719
Notes	Armour continuity kit for armoured cable available on request.
Optional accessory	Cleaner UNIVERSAL CLEANER 121 (see Accessories)
	Shield continuity wire SVL (see Accessories)
	Connectors (see Connecting technology)


Characteristics

Compact dimensions
Splice area visible before casting
High-quality transparent shockproof plastic shell
Resistant to chemical agents
Stabilized against UV rays
Resistant to alkaline earth elements
Longitudinally and transversely watertight
High electrical insulating values
High mechanical strength
Ready for immediate operation
Quick, safe and easy assembly

Applications

Indoor
Outdoor
Underground
Water
Installation ducts

Technical data

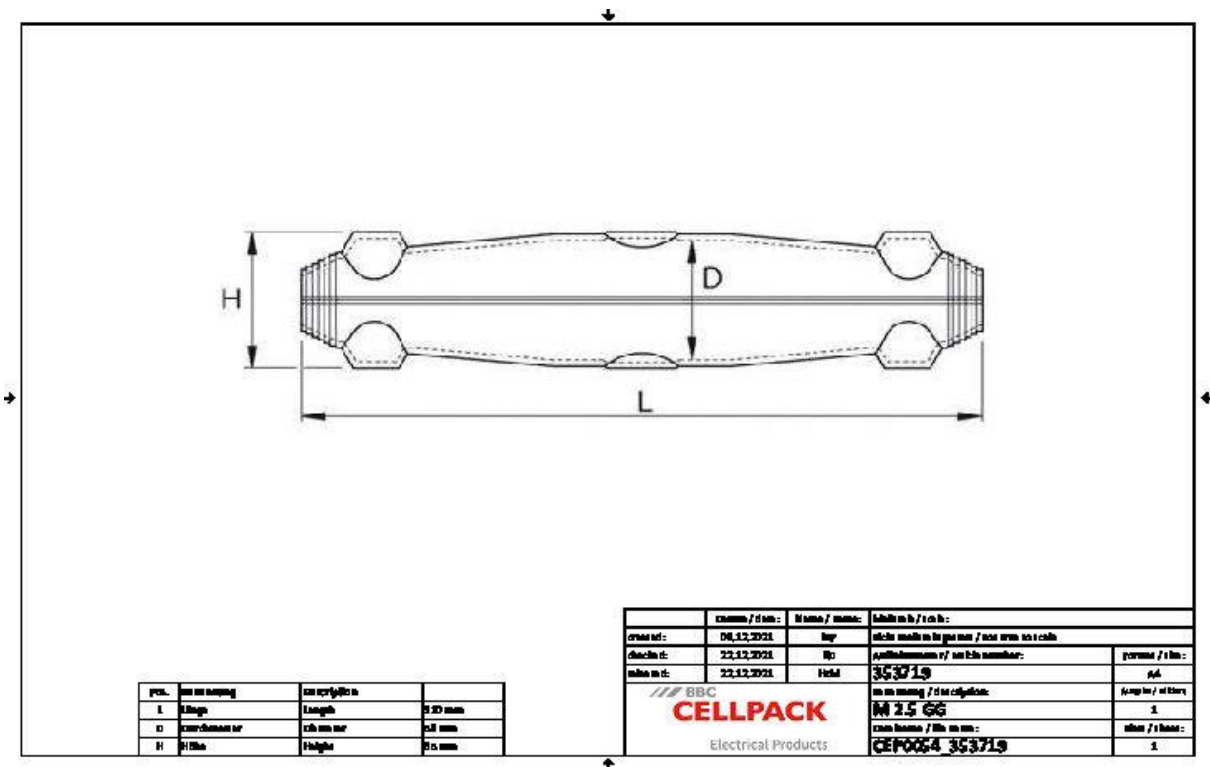

Article name	M 2.5 GG
Article number	353719
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	310 mm
Height H	65 mm
Diameter D	58 mm
Nominal cross section Polymeric cable unarmoured per conductor 1x max	300 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 2x max	70 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 3x max	70 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	50 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	35 mm ²
Diameter cable max	37 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 3x max	35 mm ²
Nominal cross section Polymeric cable with concentric conductor per conductor 4x max	25 mm ²
Nominal cross section Polymeric cable armoured per conductor mm ² 3x	35 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x min	16 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x max	35 mm ²
Control and signal cable 0,75 mm ² Number of conductors	154 Pieces
Control and signal cable 1,5 mm ² Number of conductors	96 Pieces
Control and signal cable 0,4 mm Number of wire pairs min	200 Pieces
Control and signal cable 0,4 mm Number of wire pairs max	250 Pieces
Control and signal cable 0,6 mm Number of wire pairs min	100 Pieces
Control and signal cable 0,6 mm Number of wire pairs max	120 Pieces
Control and signal cable 0,8 mm Number of wire pairs min	50 Pieces
Control and signal cable 0,8 mm Number of wire pairs max	70 Pieces

Logistics data

Article name	M 2.5 GG
Article number	353719
Delivery scope	Fill and air-release funnel
	Hydrolysis resistance PUR cast resin GG
	Packed in practical and easy-to-use two-chamber bags
	Transparent plastic shell
	PVC insulation tape
	Protective gloves
	Assembly instructions
Shelf life	24 Month
Storage temperatur max	35 °C
Storage temperatur min	15 °C
Country of origin	Germany
Customs tariff number	39095090
EAN/GTIN	4010311171043

Packaging data

Alternative unit of measure	Case	Pal. OW
Base quantity	1	140
Base unit of measure	Piece	Piece
Lenght (mm)	380	1200
Width (mm)	310	800
Height (mm)	70	1130
Net weight (kg)	1.353	189.42
Gross weight (kg)	1.353	207.62