

## Cast resin straight-through joint

for control cables and signal cables

Universally suitable for connecting control cables and signal cables or as a cable sheath repair protection joint. With hydrolysis resistance PUR cast resin EG. Suitable for compression connectors.



### Product description

Article name	MZ 00 EG
Article number	124505
Notes	REACH Regulation on the restriction of diisocyanates (for EU countries only)The European Commission amended Annex XVII of the REACH Regulation (EC) (new number 74) with Regulation (EU) 2020/1149, which entered into force on 24 August 2020. In accordance with the new REACH Regulation, appropriate training will be required prior to the industrial or professional use of diisocyanates, adhesives and sealants as of 24 August 2023. All information regarding training materials and training courses is available on the ISOPA/ALIPA website <a href="https://www.safeusediisocyanates.eu/">https://www.safeusediisocyanates.eu/</a>
Optional accessory	Compression connectors (see Connecting technology) Cleaner UNIVERSAL CLEANER 121 (see Accessories) Shield continuity wire SVL (see Accessories)


#### Characteristics

Compact dimensions
Splice area visible before casting
High-quality transparent shockproof plastic shell
Resistant to chemical agents
Stabilized against UV rays
Resistant to alkaline earth elements
Longitudinally and transversely watertight
High electrical insulating values
High mechanical strength
Ready for immediate operation
Quick, safe and easy assembly
Large filler aperture to facilitate casting

#### Applications

Indoor
Outdoor
Underground
Water
Installation ducts

Technical data

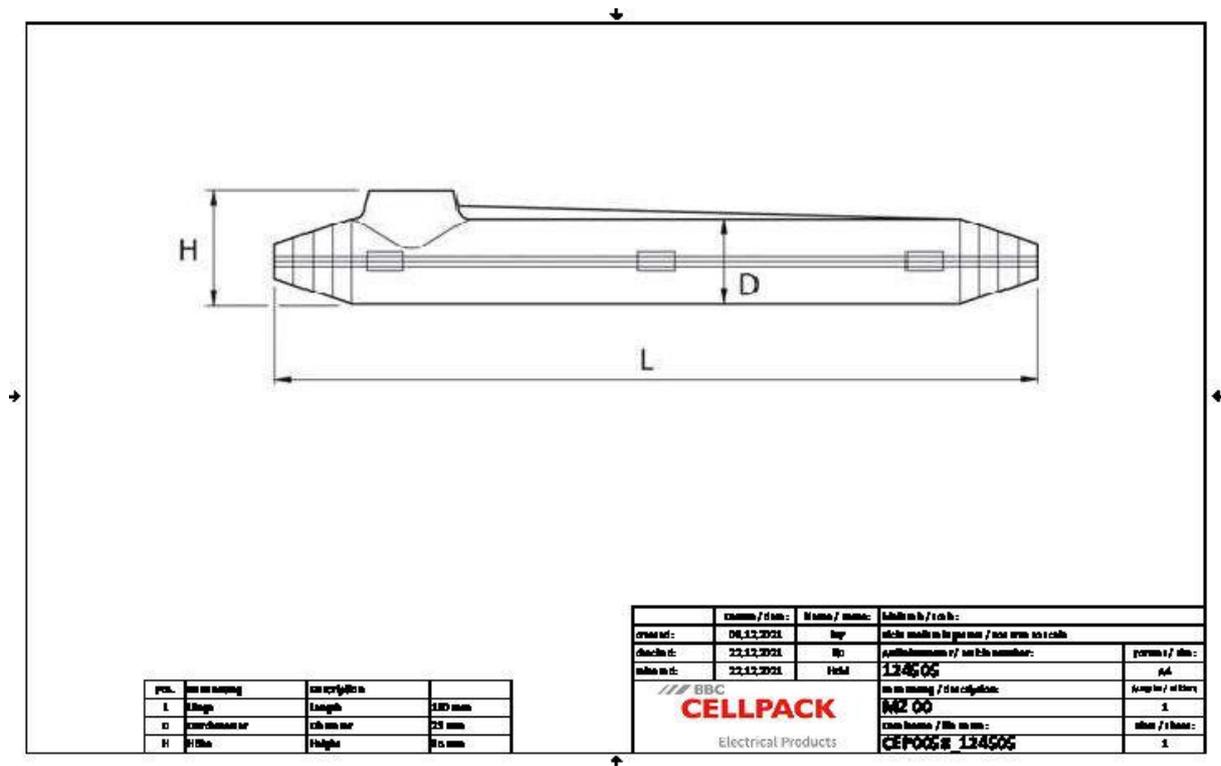

Article name	MZ 00 EG
Article number	124505
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	180 mm
Height H	35 mm
Diameter D	23 mm
Diameter cable max	20 mm
Control and signal cable 1,5 mm <sup>2</sup> Number of conductors	7 Pieces
Control and signal cable 2,5 mm <sup>2</sup> Number of conductors	5 Pieces
Control and signal cable 0,4 mm Number of wire pairs min	10 Pieces
Control and signal cable 0,4 mm Number of wire pairs max	15 Pieces
Control and signal cable 0,6 mm Number of wire pairs min	5 Pieces
Control and signal cable 0,6 mm Number of wire pairs max	10 Pieces
Control and signal cable 0,8 mm Number of wire pairs min	5 Pieces
Control and signal cable 0,8 mm Number of wire pairs max	10 Pieces

## Logistics data

Article name	MZ 00 EG
Article number	124505
Delivery scope	Fill and air-release funnel
	Hydrolysis resistance PUR cast resin EG
	Packed in practical and easy-to-use two-chamber bags
	Transparent plastic shell
	PVC insulation tape
	Protective gloves
	Spacer mesh
	Assembly instructions
Shelf life	40 Month
Storage temperatur max	35 °C
Storage temperatur min	15 °C
Country of origin	Germany
Customs tariff number	39095090
EAN/GTIN	4010311000022

## Packaging data

Alternative unit of measure	Case	Pal. OW
Base quantity	1	480
Base unit of measure	Piece	Piece
Lenght (mm)	208	1200
Width (mm)	157	800
Height (mm)	49	1130
Net weight (kg)	0.245	117.6
Gross weight (kg)	0.245	135.8