

Cast resin straight-through joint
drummable for unarmoured polymeric cables

Universally applicable as repair joints for flexible rubber cable. With hydrolysis resistance PUR cast resin FG.




Product description

| | |
|--------------------|---|
| Article name | MZ 2 FG |
| Article number | 124517 |
| Notes | REACH Regulation on the restriction of diisocyanates (for EU countries only)The European Commission amended Annex XVII of the REACH Regulation (EC) (new number 74) with Regulation (EU) 2020/1149, which entered into force on 24 August 2020. In accordance with the new REACH Regulation, appropriate training will be required prior to the industrial or professional use of diisocyanates, adhesives and sealants as of 24 August 2023. All information regarding training materials and training courses is available on the ISOPA/ALIPA website https://www.safeusediisocyanates.eu/ |
| Optional accessory | Cleaner UNIVERSAL CLEANER 121 (see Accessories) |

| |
|---|
| Characteristics |
| Compact dimensions |
| Splice area visible before casting |
| High-quality transparent shockproof plastic shell |
| Resistant to chemical agents |
| Stabilized against UV rays |
| Resistant to alkaline earth elements |
| Longitudinally and transversely watertight |
| High electrical insulating values |
| High mechanical strength |
| Ready for immediate operation |
| Quick, safe and easy assembly |

| |
|--------------------|
| Applications |
| Indoor |
| Outdoor |
| Underground |
| Water |
| Installation ducts |

Technical data

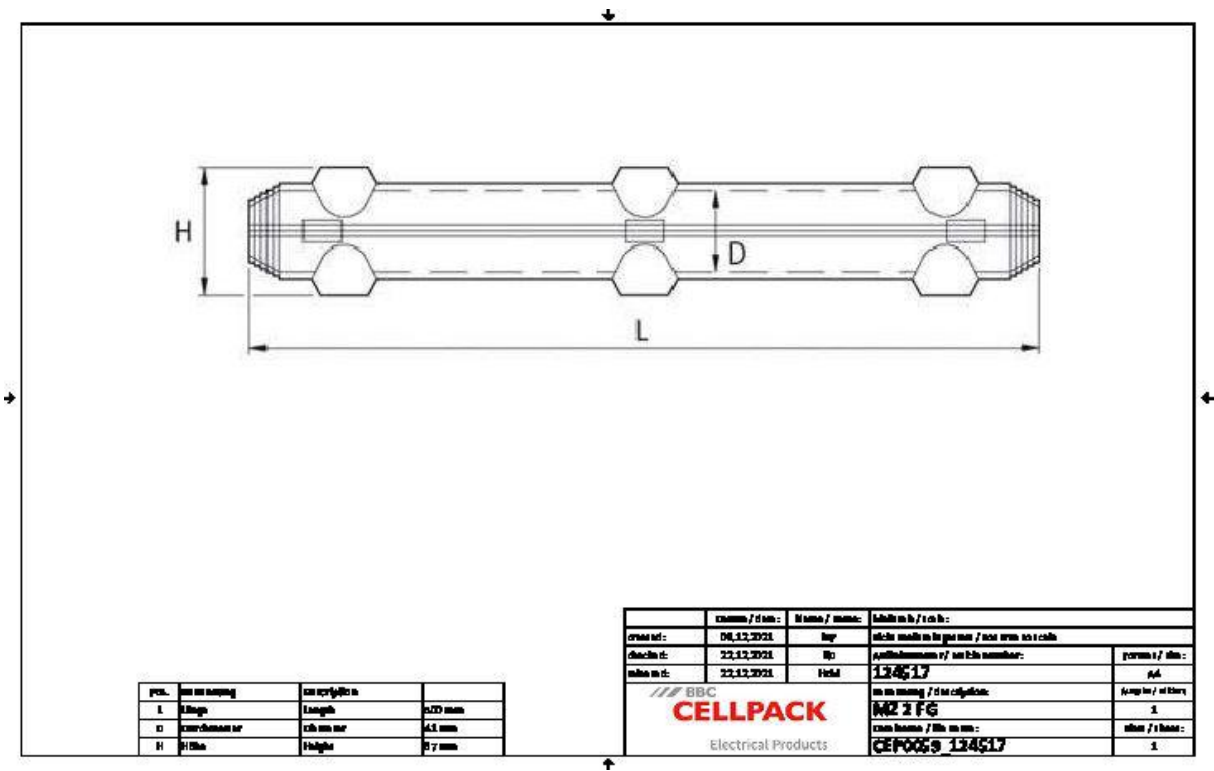

| | |
|---|--------------------------|
| Article name | MZ 2 FG |
| Article number | 124517 |
| Voltage levels | U0/U (Um) 0,6/1 (1,2) kV |
| Test standards | EN 50393 |
| Length L | 500 mm |
| Heigth H | 67 mm |
| Diameter D | 41 mm |
| Nominal cross section Polymeric cable unarmoured per conductor 4x min | 25 mm ² |
| Nominal cross section Polymeric cable unarmoured per conductor 5x min | 16 mm ² |
| Diameter cable max | 40 mm |

Logistics data

| | |
|------------------------|--|
| Article name | MZ 2 FG |
| Article number | 124517 |
| Delivery scope | Fill and air-release funnel |
| | Hydrolysis resistance PUR cast resin EG |
| | Packed in practical and easy-to-use two-chamber bags |
| | Transparent plastic shell |
| | PVC insulation tape |
| | Protective gloves |
| | Heat shrinkable tubes for connectors |
| | Assembly instructions |
| Shelf life | 24 Month |
| Storage temperatur max | 35 °C |
| Storage temperatur min | 15 °C |
| Country of origin | Germany |
| Customs tariff number | 39095090 |
| EAN/GTIN | 4010311002736 |

Packaging data

| Alternative unit of measure | Case | Pal. OW |
|-----------------------------|-------|---------|
| Base quantity | 1 | 30 |
| Base unit of measure | Piece | Piece |
| Lenght (mm) | 488 | 1200 |
| Width (mm) | 248 | 800 |
| Height (mm) | 195 | 1130 |
| Net weight (kg) | 1.844 | 55.32 |
| Gross weight (kg) | 1.844 | 73.52 |