

Heat shrinkable cable termination

for armoured polymeric cables mit konzentrischem Leiter

Universally suitable for connecting polymeric cables and cable sheaths insulated with PVC and PE with concentric conductor (e.g. GKN) or protective armour (e.g. GN-CLN). Suitable for compression lugs or compression connectors on aluminium and copper conductors.




Product description

Article name	SEH4 25 A+Z
Article number	126805
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength
Ready for immediate operation

Applications
Indoor
Outdoor
For double compression connectors with separators complying with DIN 46267

Technical data

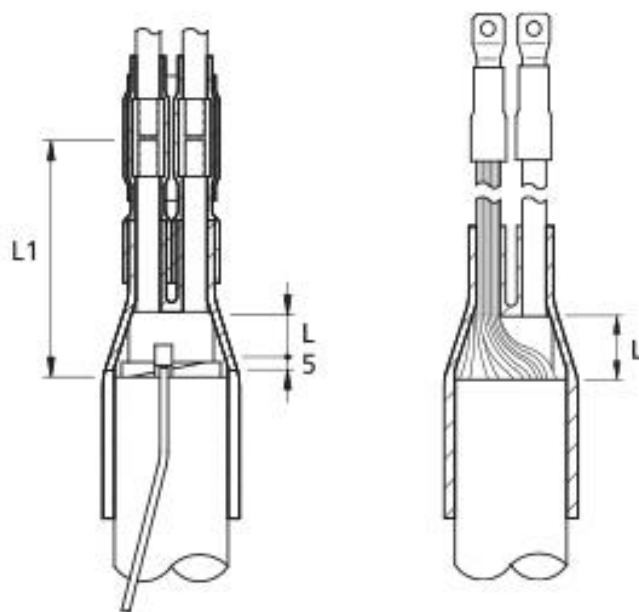

Article name	SEH4 25 A+Z
Article number	126805
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	20 mm
Length L1	85 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 3x max	25 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x min	25 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x max	25 mm ²

Logistics data

Article name	SEH4 25 A+Z
Article number	126805
Delivery scope	Sealing tubes
	Spreader cap
	Core insulating tubes
	incl. 4 compression connectors with separator
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311048659

Packaging data

Packaging type	Bag1
Content quantity	1
Unit of measure	Piece
Length (mm)	276
Width (mm)	130
Height (mm)	52
Net weight (kg)	0.194
Gross weight (kg)	0.194