

Heat shrinkable indoor cable termination

for polymeric cables with concentric conductor

For connecting polymeric cables to distribution cupboards and panels. Suitable for PVC and XLPE insulated cables and PVC and PE cable sheaths with concentric conductor (e.g. GKN). Suitable for compression lugs on aluminium and copper conductors.




Product description

Article name	SEH4 120-240 V-C
Article number	126824
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength
Ready for immediate operation

Applications
Indoor

Technical data

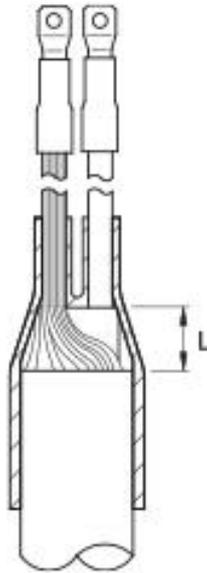

Article name	SEH4 120-240 V-C
Article number	126824
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	20 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 3x min	120 mm ²
Nominal cross section Polymeric cable with concentric conductor per conductor 3x max	240 mm ²

Logistics data

Article name	SEH4 120-240 V-C
Article number	126824
Delivery scope	Sealing tubes
	Heat shrinkable tube green-yellow
	Spreader cap
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311114705

Packaging data

Packaging type	Bag1
Content quantity	1
Unit of measure	Piece
Length (mm)	354
Width (mm)	201
Height (mm)	102
Net weight (kg)	0.291
Gross weight (kg)	0.291