

Heat shrinkable indoor cable termination
for armoured polymeric cables

For connecting polymeric cables to distribution cupboards and panels. Suitable for PVC and XLPE insulated cables and PVC and PE cable sheaths with protective armouring (e.g. GN-CLN). Suitable for compression lugs on aluminium and copper conductors.




Product description

Article name	SEH4 10-35 V-S
Article number	131999
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength
Ready for immediate operation

Applications
Indoor

Technical data

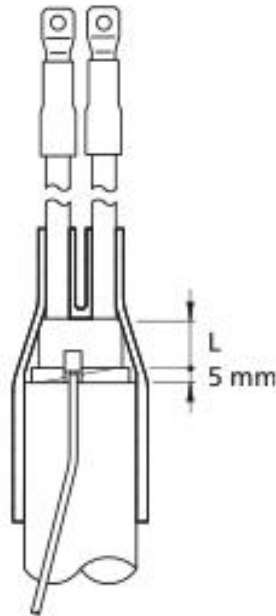

Article name	SEH4 10-35 V-S
Article number	131999
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	20 mm
Nominal cross section Polymeric cable armoured per conductor 4x min	10 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x max	35 mm ²

Logistics data

Article name	SEH4 10-35 V-S
Article number	131999
Delivery scope	Sealing tubes
	Spreader cap
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311156897

Packaging data

Packaging type	Bag1
Content quantity	1
Unit of measure	Piece
Length (mm)	238
Width (mm)	121
Height (mm)	47
Net weight (kg)	0.077
Gross weight (kg)	0.077