

## Heat shrinkable spreader cap

for 2- 3- 4- 5-core cables with adhesive

Sealing spreader caps for plastic-, rubber- and paper-insulated cables.




### Product description

Article name	SEH2 30-10
Article number	125374
Notes	Recovered dimension after shrinking

Characteristics
With hot melt adhesive
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Superior electrical properties
Pressure-tight
Superior mechanical properties
100 % waterproof

Applications
Indoor
Outdoor

## Technical data

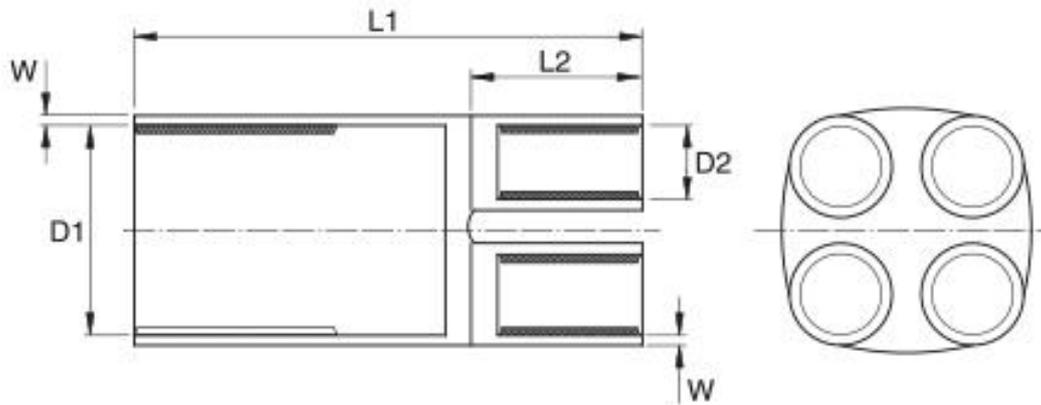

Article name	SEH2 30-10
Article number	125374
Test standards	IEC 60684-2
Materials	Cross-linked polyolefin Free of lead and cadmium
Selection Note	2-fingers spreader cap
Length L1	67 mm
Length L1*	89 mm
Length L2	17 mm
Colours	black
Inner diameter D1 before shrinking	30
Inner diameter D1 after shrinking	10
Inner diameter D2 before shrinking	16
Inner diameter D2 after shrinking	3.7
Recovered wall thickness	3.1 mm
Nominal cross section min	2.5 mm <sup>2</sup>
Nominal cross section max	25 mm <sup>2</sup>
Elongation at break	300 %
Elongation at break (associated standard)	IEC 62677-2
Tensile strength at break	10 MPa
Tensile strength at break (associated standard)	IEC 62677-2
Shrinkage temperature	> 110 °C
Burning behaviour	not self-extinguishing
Burning behaviour (associated standard)	IEC 60684-2
Flexibility at low temperatures	-40 °C
Flexibility at low temperatures (associated standard)	IEC 62677-2
Thermal ageing (168 h at 150 °C): Elongation at break	200 %
Thermal ageing (168 h at 150 °C): Tensile strength at break	8 MPa
Thermal ageing (168 h at 150 °C) (associated standard)	IEC 62677-2
Operation temperature min	-40 °C
Operation temperature max	100 °C

Operation temperature (associated standard)	IEC 62677-2
Specific volume resistivity	10 <sup>12</sup> Ω cm
Specific volume resistivity (associated standard)	EN 62677-2
Dielectric strength	10 kV/mm
Dielectric strength (associated standard)	IEC 60243-1
Corrosion	none
Corrosion (associated standard)	EN 62677-2
Resistance to fungus and decay	Rate 1
Resistance to fungus and decay (associated standard)	IEC 62677-2

## Logistics data

Article name	SEH2 30-10
Article number	125374
Delivery scope	Heat shrinkable spreader cap
Shelf life description	Unlimited shelf life
Country of origin	India
Customs tariff number	39174000
EAN/GTIN	4010311041124

## Packaging data

Packaging type	Bag	Carton
Content quantity	20	1500
Unit of measure	Piece	Piece
Length (mm)	290	630
Width (mm)	185	415
Height (mm)	40	570
Net weight (kg)	0.26	19.5
Gross weight (kg)	0.265	19.8