

Voltage-resistant pot end joint  
with inner caps and outer cap with voltage arrow

Universal pot end cable terminations of unarmoured polymeric-insulated cables and conductors as well as polymeric-insulated cables with concentric conductors with insulation made of PVC, PE and XLPE, e.g. N(A)YY, N(A)XY, TT, N(A)2Y2Y, N(A)2X2Y, N(A)YC(W)Y.




Product description

Article name	SEMH4-K 35-150
Article number	145386

Characteristics
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

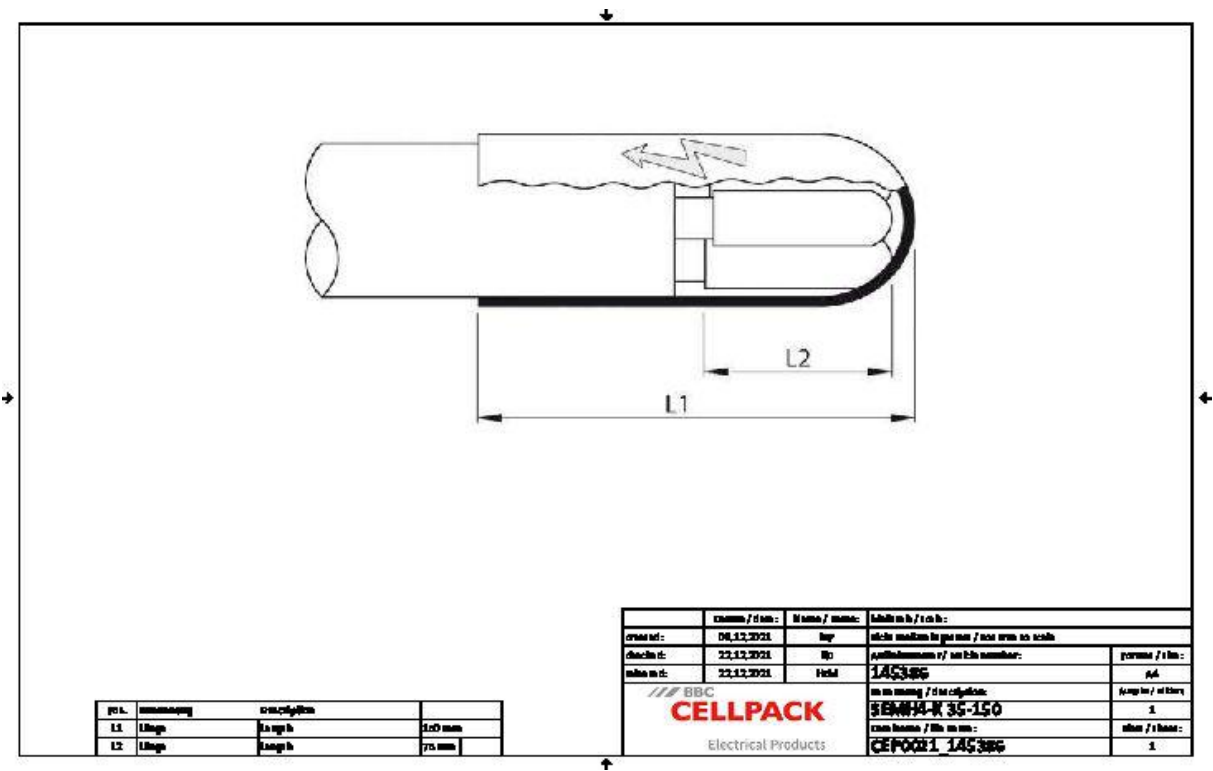

Article name	SEMHA-K 35-150
Article number	145386
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	150 mm
Length L2	75 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	35 mm <sup>2</sup>
Nominal cross section Polymeric cable unarmoured per conductor 4x max	150 mm <sup>2</sup>
Nominal cross section Polymeric cable with concentric conductor per conductor 4x min	35 mm <sup>2</sup>
Nominal cross section Polymeric cable with concentric conductor per conductor 4x max	150 mm <sup>2</sup>

## Logistics data

Article name	SEMH4-K 35-150
Article number	145386
Delivery scope	Sealing caps
	Heat shrinkable cap with voltage arrow
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311017365

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	100
Base unit of measure	Piece	Piece
Length (mm)	240	585
Width (mm)	198	390
Height (mm)	60	490
Net weight (kg)	0.094	9.4
Gross weight (kg)	0.094	9.7