

Voltage-resistant pot end joint

with inner caps and outer cap with voltage arrow

Universal pot end cable terminations of unarmoured polymeric-insulated cables and conductors as well as polymeric-insulated cables with concentric conductors with insulation made of PVC, PE and XLPE, e.g. N(A)YY, N(A)XY, TT, N(A)2Y2Y, N(A)2X2Y, N(A)YC(W)Y.



Product description

Article name	SEMH4-K 185-300
Article number	145391


Characteristics

Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications

Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

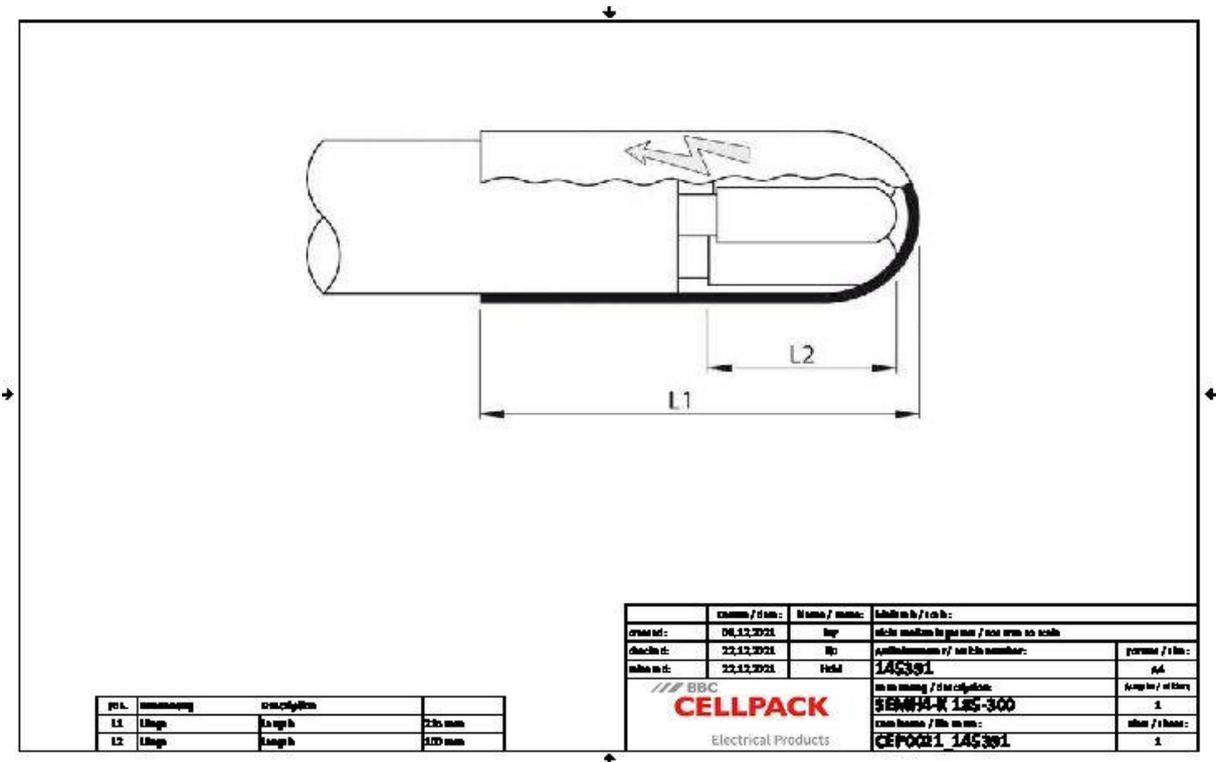

Article name	SEMHA-K 185-300
Article number	145391
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	215 mm
Length L2	100 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	185 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	300 mm ²
Nominal cross section Polymeric cable with concentric conductor per conductor 4x min	185 mm ²
Nominal cross section Polymeric cable with concentric conductor per conductor 4x max	300 mm ²

Logistics data

Article name	SEMH4-K 185-300
Article number	145391
Delivery scope	Sealing caps
	Heat shrinkable cap with voltage arrow
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311017372

Packaging data

Alternative unit of measure	Bag1
Base quantity	1
Base unit of measure	Piece
Length (mm)	244
Width (mm)	190
Height (mm)	100
Net weight (kg)	0.218
Gross weight (kg)	0.218