

Voltage-resistant pot end joint
with inner cap for mass-impregnated paper cables

Pot end cable terminations for mass-impregnated paper cables (e.g. N(A)KBA, NAKLEY, PPb).




Product description

Article name	SEMHK4 16-50 Pb
Article number	145396

Characteristics
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

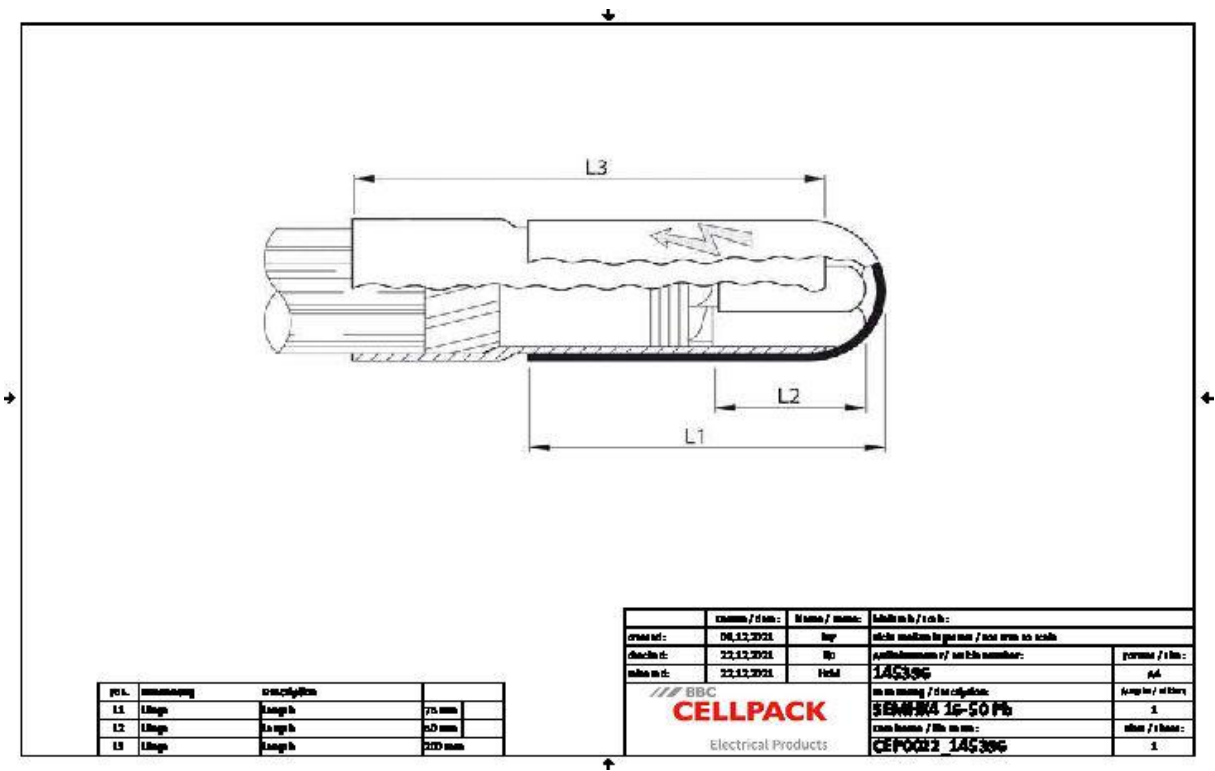

Article name	SEMHK4 16-50 Pb
Article number	145396
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	75 mm
Length L2	50 mm
Length L3	200 mm
Nominal cross section Mass-impregnated paper cable per conductor 4x min	16 mm²
Nominal cross section Mass-impregnated paper cable per conductor 4x max	50 mm²

Logistics data

Article name	SEMHK4 16-50 Pb
Article number	145396
Delivery scope	Sealing tube
	Heat shrinkable cap with voltage arrow
	Sealing caps
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311029856

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	30
Base unit of measure	Piece	Piece
Length (mm)	273	480
Width (mm)	246	395
Height (mm)	67	365
Net weight (kg)	0.107	3.21
Gross weight (kg)	0.107	3.51