

Voltage-resistant pot end joint with inner cap for mass-impregnated paper cables

Pot end cable terminations for mass-impregnated paper cables (e.g. N(A)KBA, NAKLEY, PPb).



Product description

Article name	SEMHK4 95-300 Pb
Article number	145398

Characteristics

Wide conductor and cross-section range

Resistant to chemical agents

Resistant to alkaline earth elements

Stabilized against UV rays

Free from paint-wetting inhibiting substances

Halogen-free

Transversely waterproof

High electrical insulating values

High mechanical strength

Applications

Indoor

Outdoor


Underground

Water

Installation ducts

Ductwork

Technical data

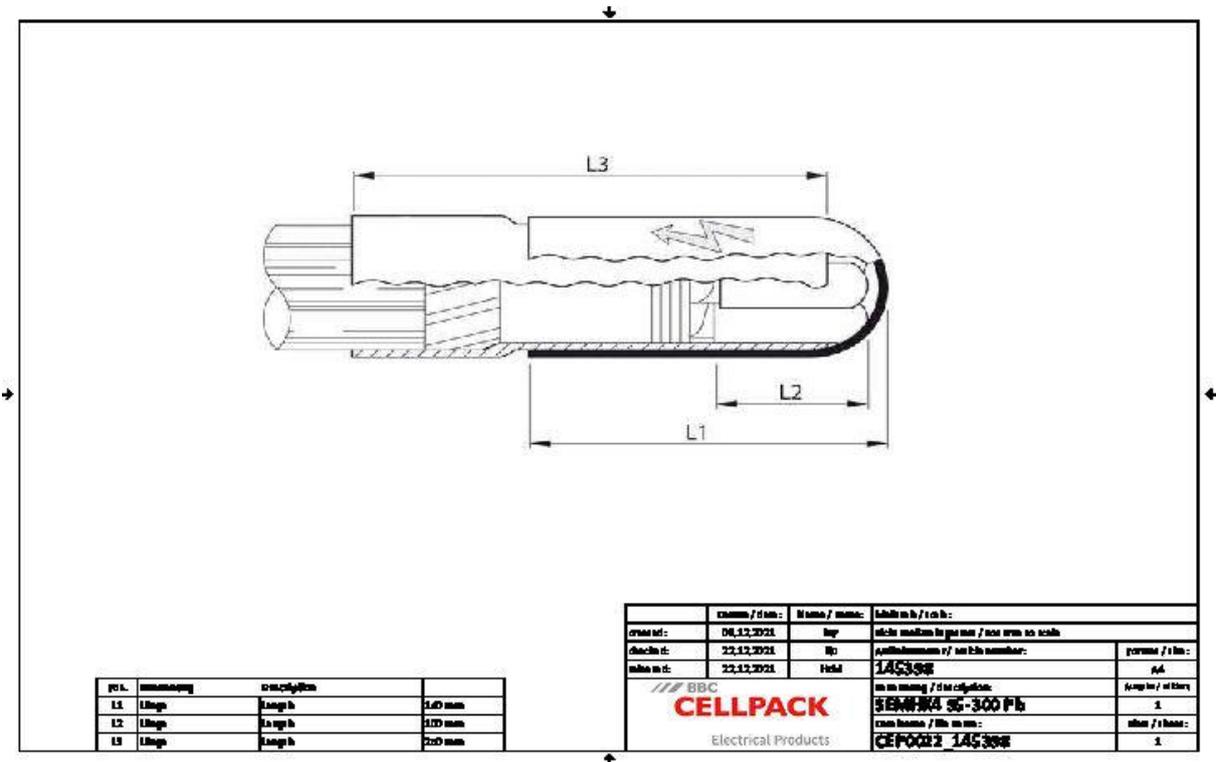

Article name	SEMHP4 95-300 Pb
Article number	145398
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	140 mm
Length L2	100 mm
Length L3	250 mm
Nominal cross section Mass-impregnated paper cable per conductor 4x min	95 mm ²
Nominal cross section Mass-impregnated paper cable per conductor 4x max	300 mm ²

Logistics data

Article name	SEMHK4 95-300 Pb
Article number	145398
Delivery scope	Sealing tube
	Heat shrinkable cap with voltage arrow
	Sealing caps
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311029870

Packaging data

Alternative unit of measure	Bag1
Base quantity	1
Base unit of measure	Piece
Length (mm)	280
Width (mm)	203
Height (mm)	107
Net weight (kg)	0.279
Gross weight (kg)	0.279